



STATE OF OREGON  
DEPARTMENT OF GEOLOGY AND MINERAL INDUSTRIES  
www.OregonGeology.org  
Larry Givens, Governing Board Chair  
Rick S. McConnell, Director and State Geologist  
Don W.T. Lewis, Assistant Director  
Rachel R. Lyles Smith, Project Operations Manager  
Ian P. Madin, Chief Scientist

## Introduction

The Oregon Department of Geology and Mineral Industries (DOGAMI) has been identifying and mapping the tsunami inundation hazard along the Oregon coast since 1994. In Oregon, DOGAMI manages the National Tsunami Hazard Mitigation Program, which has been administered by the National Oceanic and Atmospheric Administration (NOAA) since 1995. DOGAMI's work is designed to help cities, counties, and other sites in coastal areas reduce the potential for disastrous tsunami-related consequences by understanding and mitigating the geologic hazard. Using federal funding awarded by NOAA, DOGAMI has developed a new generation of tsunami inundation maps to help residents and visitors along the entire Oregon coast prepare for the next Cascadia Subduction Zone (CSZ) earthquake and tsunami.

**CSZ Frequency:** Comprehensive research of the offshore geologic record indicates that at least 19 major ruptures of the full length of the CSZ have occurred off the Oregon coast over the past 10,000 years (Figure 3). All 19 of these full-rupture CSZ events were likely magnitude 8.9 to 9.2 earthquakes (Witter and others, 2011). The most recent CSZ event happened approximately 300 years ago on January 26, 1700. Sand deposits carried onshore and left by the 1700 event have been found 1.2 miles inland. Older tsunami sand deposits have also been discovered in estuaries 6 miles inland. As shown in Figure 3, the range in time between these 19 events varied from 110 to 1,100 years with an average time interval of 490 years. In 2008, the United States Geological Survey (USGS) released the results of a study announcing that the probability of a magnitude 8.9 CSZ earthquake occurring over the next 300 years is 10% and that such earthquakes occur about every 500 years (WGCEP 2008).

**CSZ Model Specifications:** The size of the earthquake and its resultant tsunami are primarily driven by the amount and geometry of the slip that takes place when the North American Plate snaps westward over the Juan de Fuca Plate during a CSZ event. DOGAMI has modeled a wide range of earthquake and tsunami sizes that take into account different fault geometries that could amplify the amount of seawater displacement and increase tsunami inundation. Seismic geophysical profiles show that there may be a steep slip fault running nearly parallel to the CSZ but varies to the Oregon coastline (Figure 1). The effect of this steep fault moving during a full-rupture CSZ event would be an increase in the amount of vertical displacement of the Pacific Ocean,

resulting in an increase of the tsunami inundation onshore in Oregon. DOGAMI has also incorporated physical evidence that suggests that portions of the coast may drop 4 to 10 feet during the earthquake; this effect is known as subsidence. Detailed information on fault geometries, subsidence, computer models, and the methodology used to create the tsunami scenarios presented on this map can be found in DOGAMI Special Papers 41 (Priest and others, 2009) and 43 (Witter and others, 2011).

## Map Explanation

This tsunami inundation map displays the output of computer models representing five selected tsunami scenarios, all of which include the earthquake-produced subsidence and the tsunami-amplifying effects of the steep fault. Each scenario assumes that a tsunami occurred at Mean Higher High Water (MHHW) tide. MHHW is defined as the average height of the higher high tides observed over an 18-year period at the Port Orford tide gauge. To make it easier to understand this scientific material and to enhance the educational aspects of hazard mitigation and response, the five scenarios are labeled as "T-shirt sizes" ranging from Small, Medium, Large, Extra Large, to Extra Extra Large (S, M, L, XL, XXL). The map legend depicts the respective amounts of slip, the frequency of occurrence, and the earthquake magnitude for these five scenarios. Figure 4 shows the cumulative number of buildings inundated within the map area.

The computer simulation model output is provided to DOGAMI as millions of points with values that indicate whether the location of each point is wet or dry. These points are converted to wet and dry contour lines that form the extent of inundation. The transition area between the wet and dry contour lines is termed the Wet/Dry Zone, which equates to the amount of error in the model when determining the maximum inundation for the each scenario. Only the XXL Wet/Dry Zone is shown on this map.

**Time-Series Graphs and Wave Elevation Profiles:** In addition to the tsunami scenarios, the computer model produces time series data for "gauge" locations in the area. These points are simulated gauge stations that record the time, in seconds, of the tsunami wave arrival and the wave height observed. It is especially noteworthy that the greatest wave height and velocity observed are not necessarily associated with the first tsunami wave to arrive onshore. Therefore evacuees should not assume that the tsunami event is over until the proper authorities have sounded the all-clear signal at the end of the evacuation. Figure 5 depicts the tsunami waves as they arrive at a simulated gauge station. Figure 6 depicts the overall wave height and inundation extent for all five scenarios at the profile location shown on this map.

## Cascadia Subduction Zone Setting



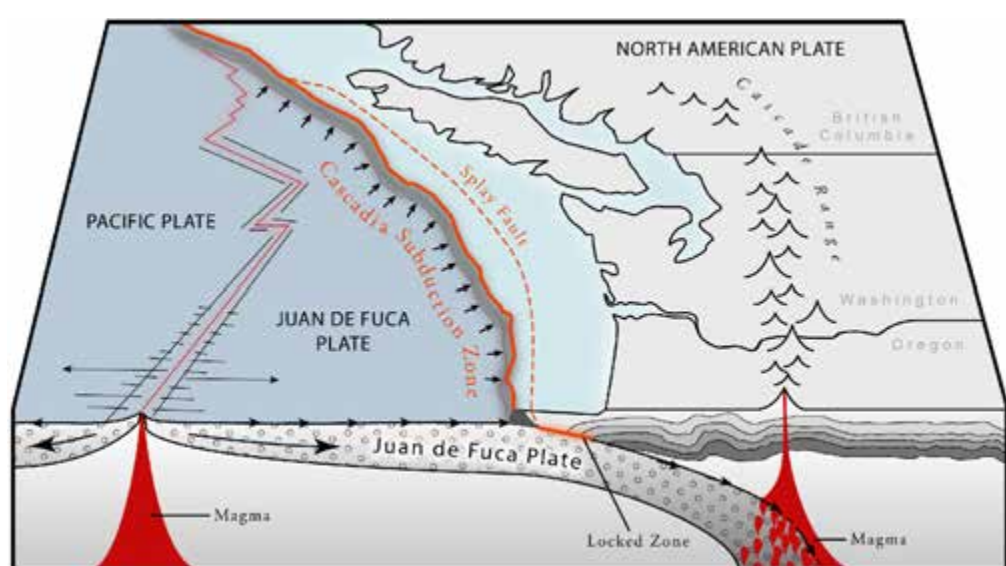


Figure 1: This block diagram depicts the tectonic setting of the region. See Figure 2 for the sequence of events that occur during a Cascadia Subduction Zone megathrust earthquake and tsunami.

## How Tsunamis Occur

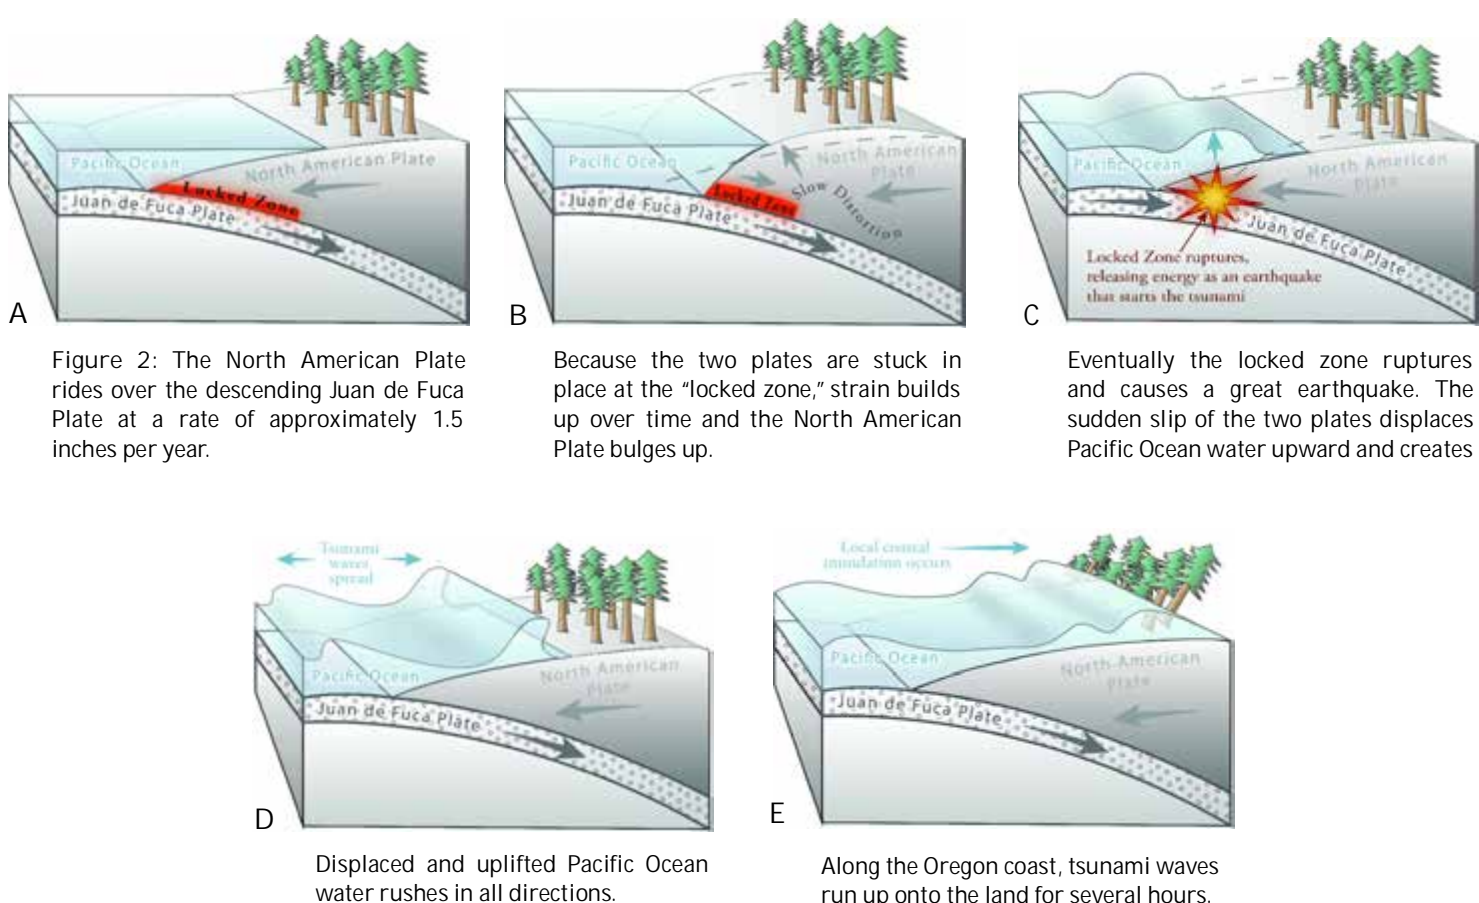

## Occurrence and Relative Size of Cascadia Subduction Zone Megathrust Earthquakes

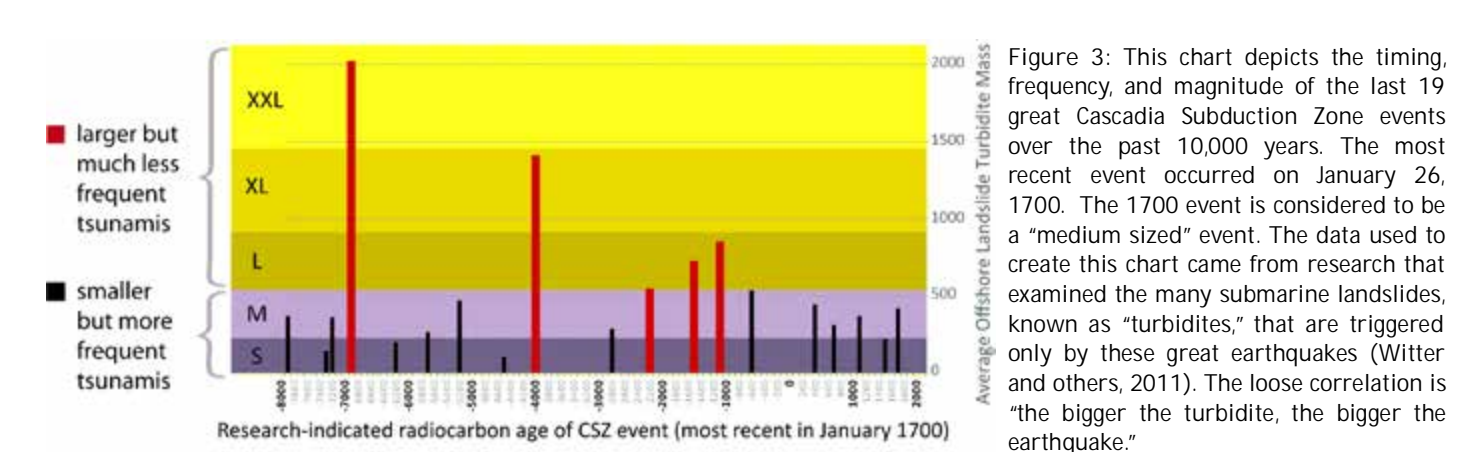

## Buildings within Tsunami Inundation Zones

Entire Map Area			Unincorporated Areas		
Total Buildings			563		
Buildings within Tsunami Zones*			563		
Small			52	52	
Medium			79	79	
Large			75	75	
Extra Large			157	157	
Extra Extra Large			172	172	
Percent of Buildings within Tsunami Zones					
Small			9.2%	9.2%	
Medium			12.4%	12.4%	
Large			13.3%	13.3%	
Extra Large			27.9%	27.9%	
Extra Extra Large			30.6%	30.6%	

\*Building counts shown are based on polygon centroids and are cumulative within the map area.

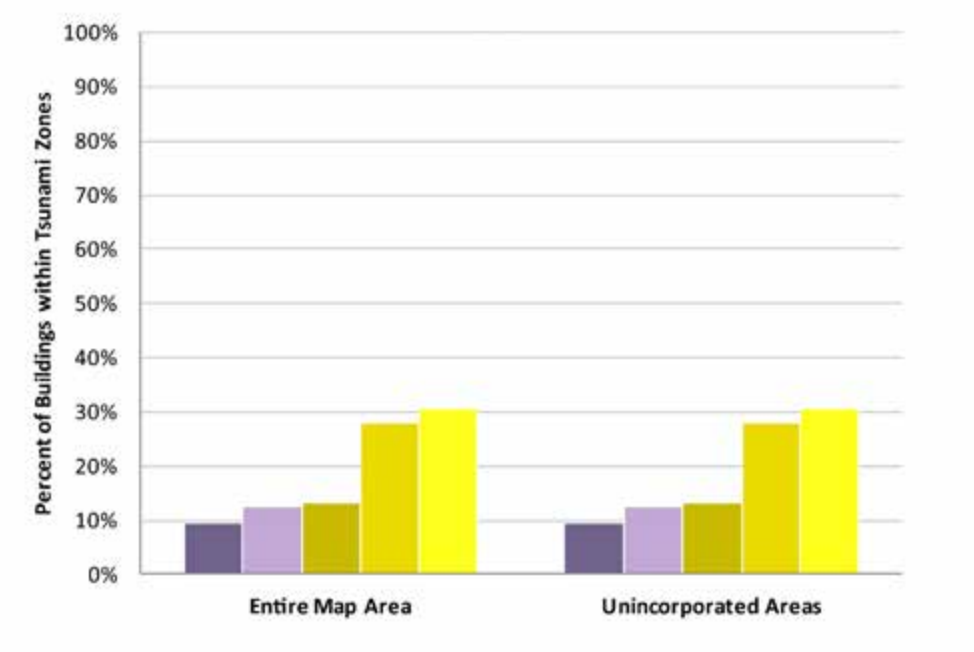


Figure 4: The table and chart show the number of buildings inundated for each 'tsunami T-shirt scenario' for cities and unincorporated portions of the map.

## Estimated Tsunami Wave Height through Time for Simulated Gauge Station

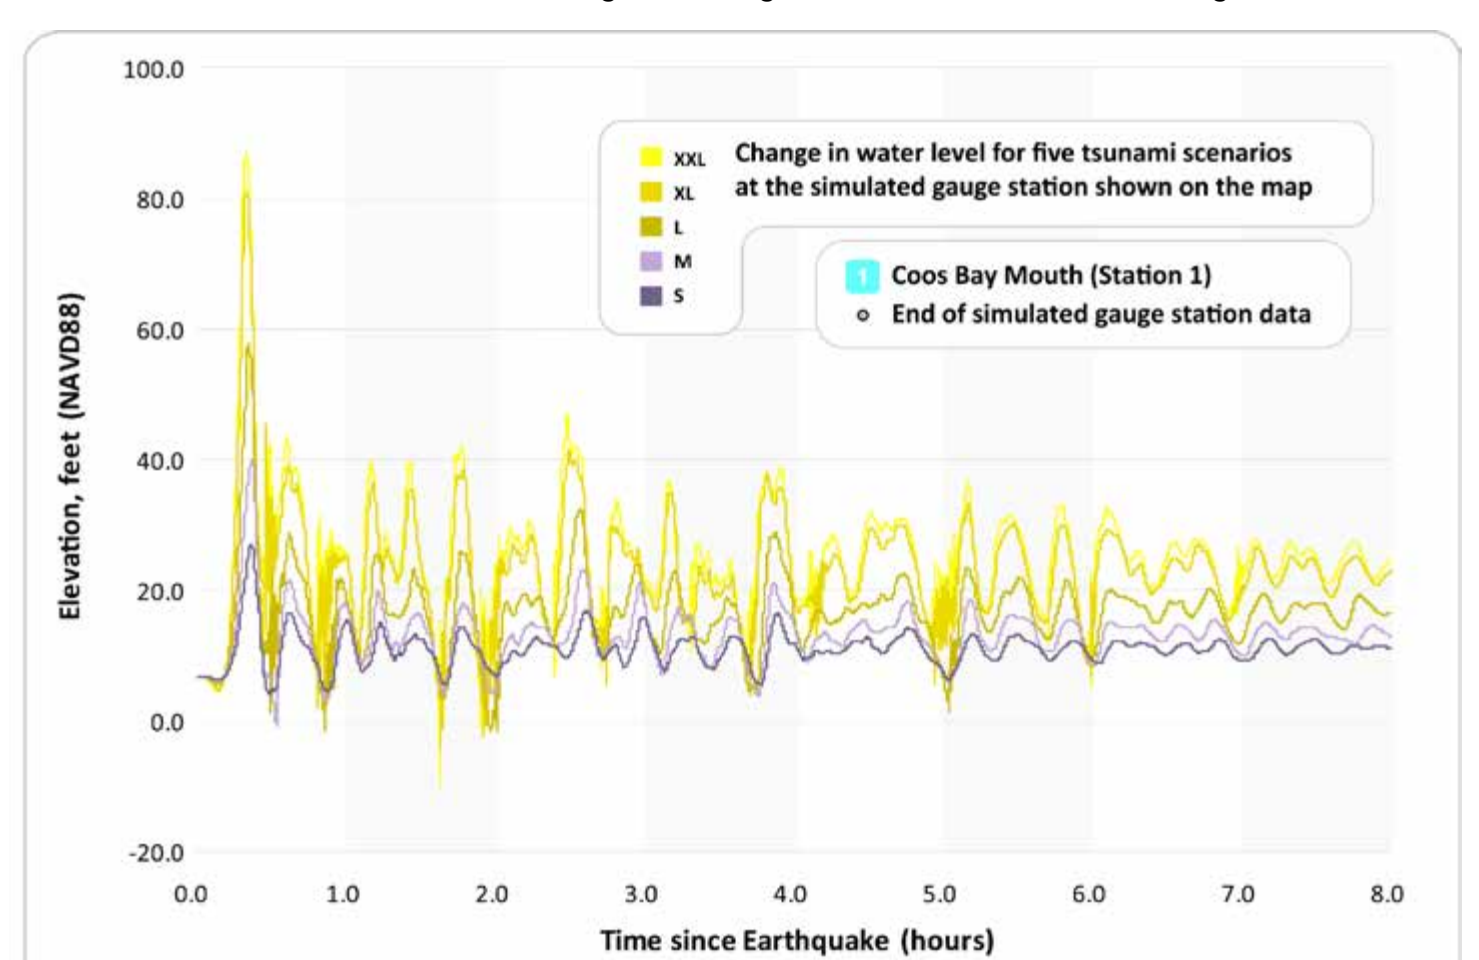


Figure 5: This chart depicts the tsunami waves as they arrive at the selected reference point (simulated gauge station). It shows the change in water heights for all five tsunami scenarios over an 8-hour period. The starting water elevation (0:00 hour) takes into account the local subsidence or uplift caused by the earthquake. Wave heights vary through time, and the first wave will not necessarily be the largest as waves interfere and reflect off local topography and bathymetry.

## Maximum Wave Elevation Profile

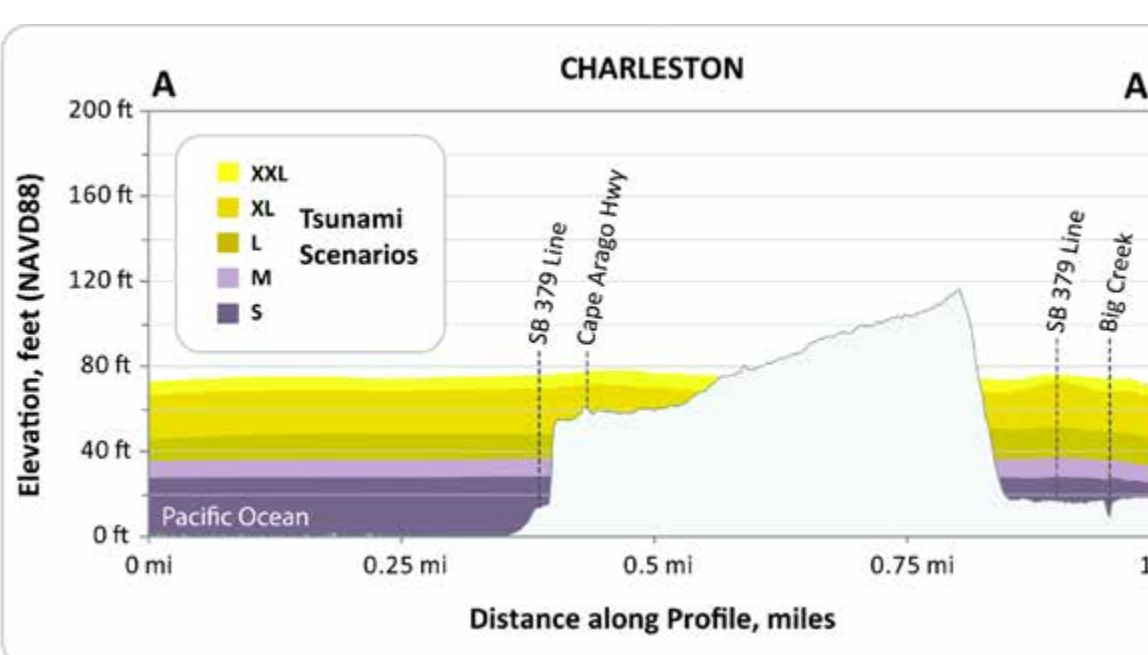


Figure 6: This profile depicts the expected maximum tsunami wave elevation for the five 'tsunami T-shirt scenarios' along the line A-A'. The tsunami scenarios are modeled to occur at high tide and to account for local subsidence or uplift of the ground surface.


# Local Source (Cascadia Subduction Zone) Tsunami Inundation Map Charleston - Cape Arago, Oregon

2012

Tsunami Inundation Map Coos-08

Tsunami Inundation Maps for Charleston - Cape Arago,  
Coos County, Oregon


Plate 1

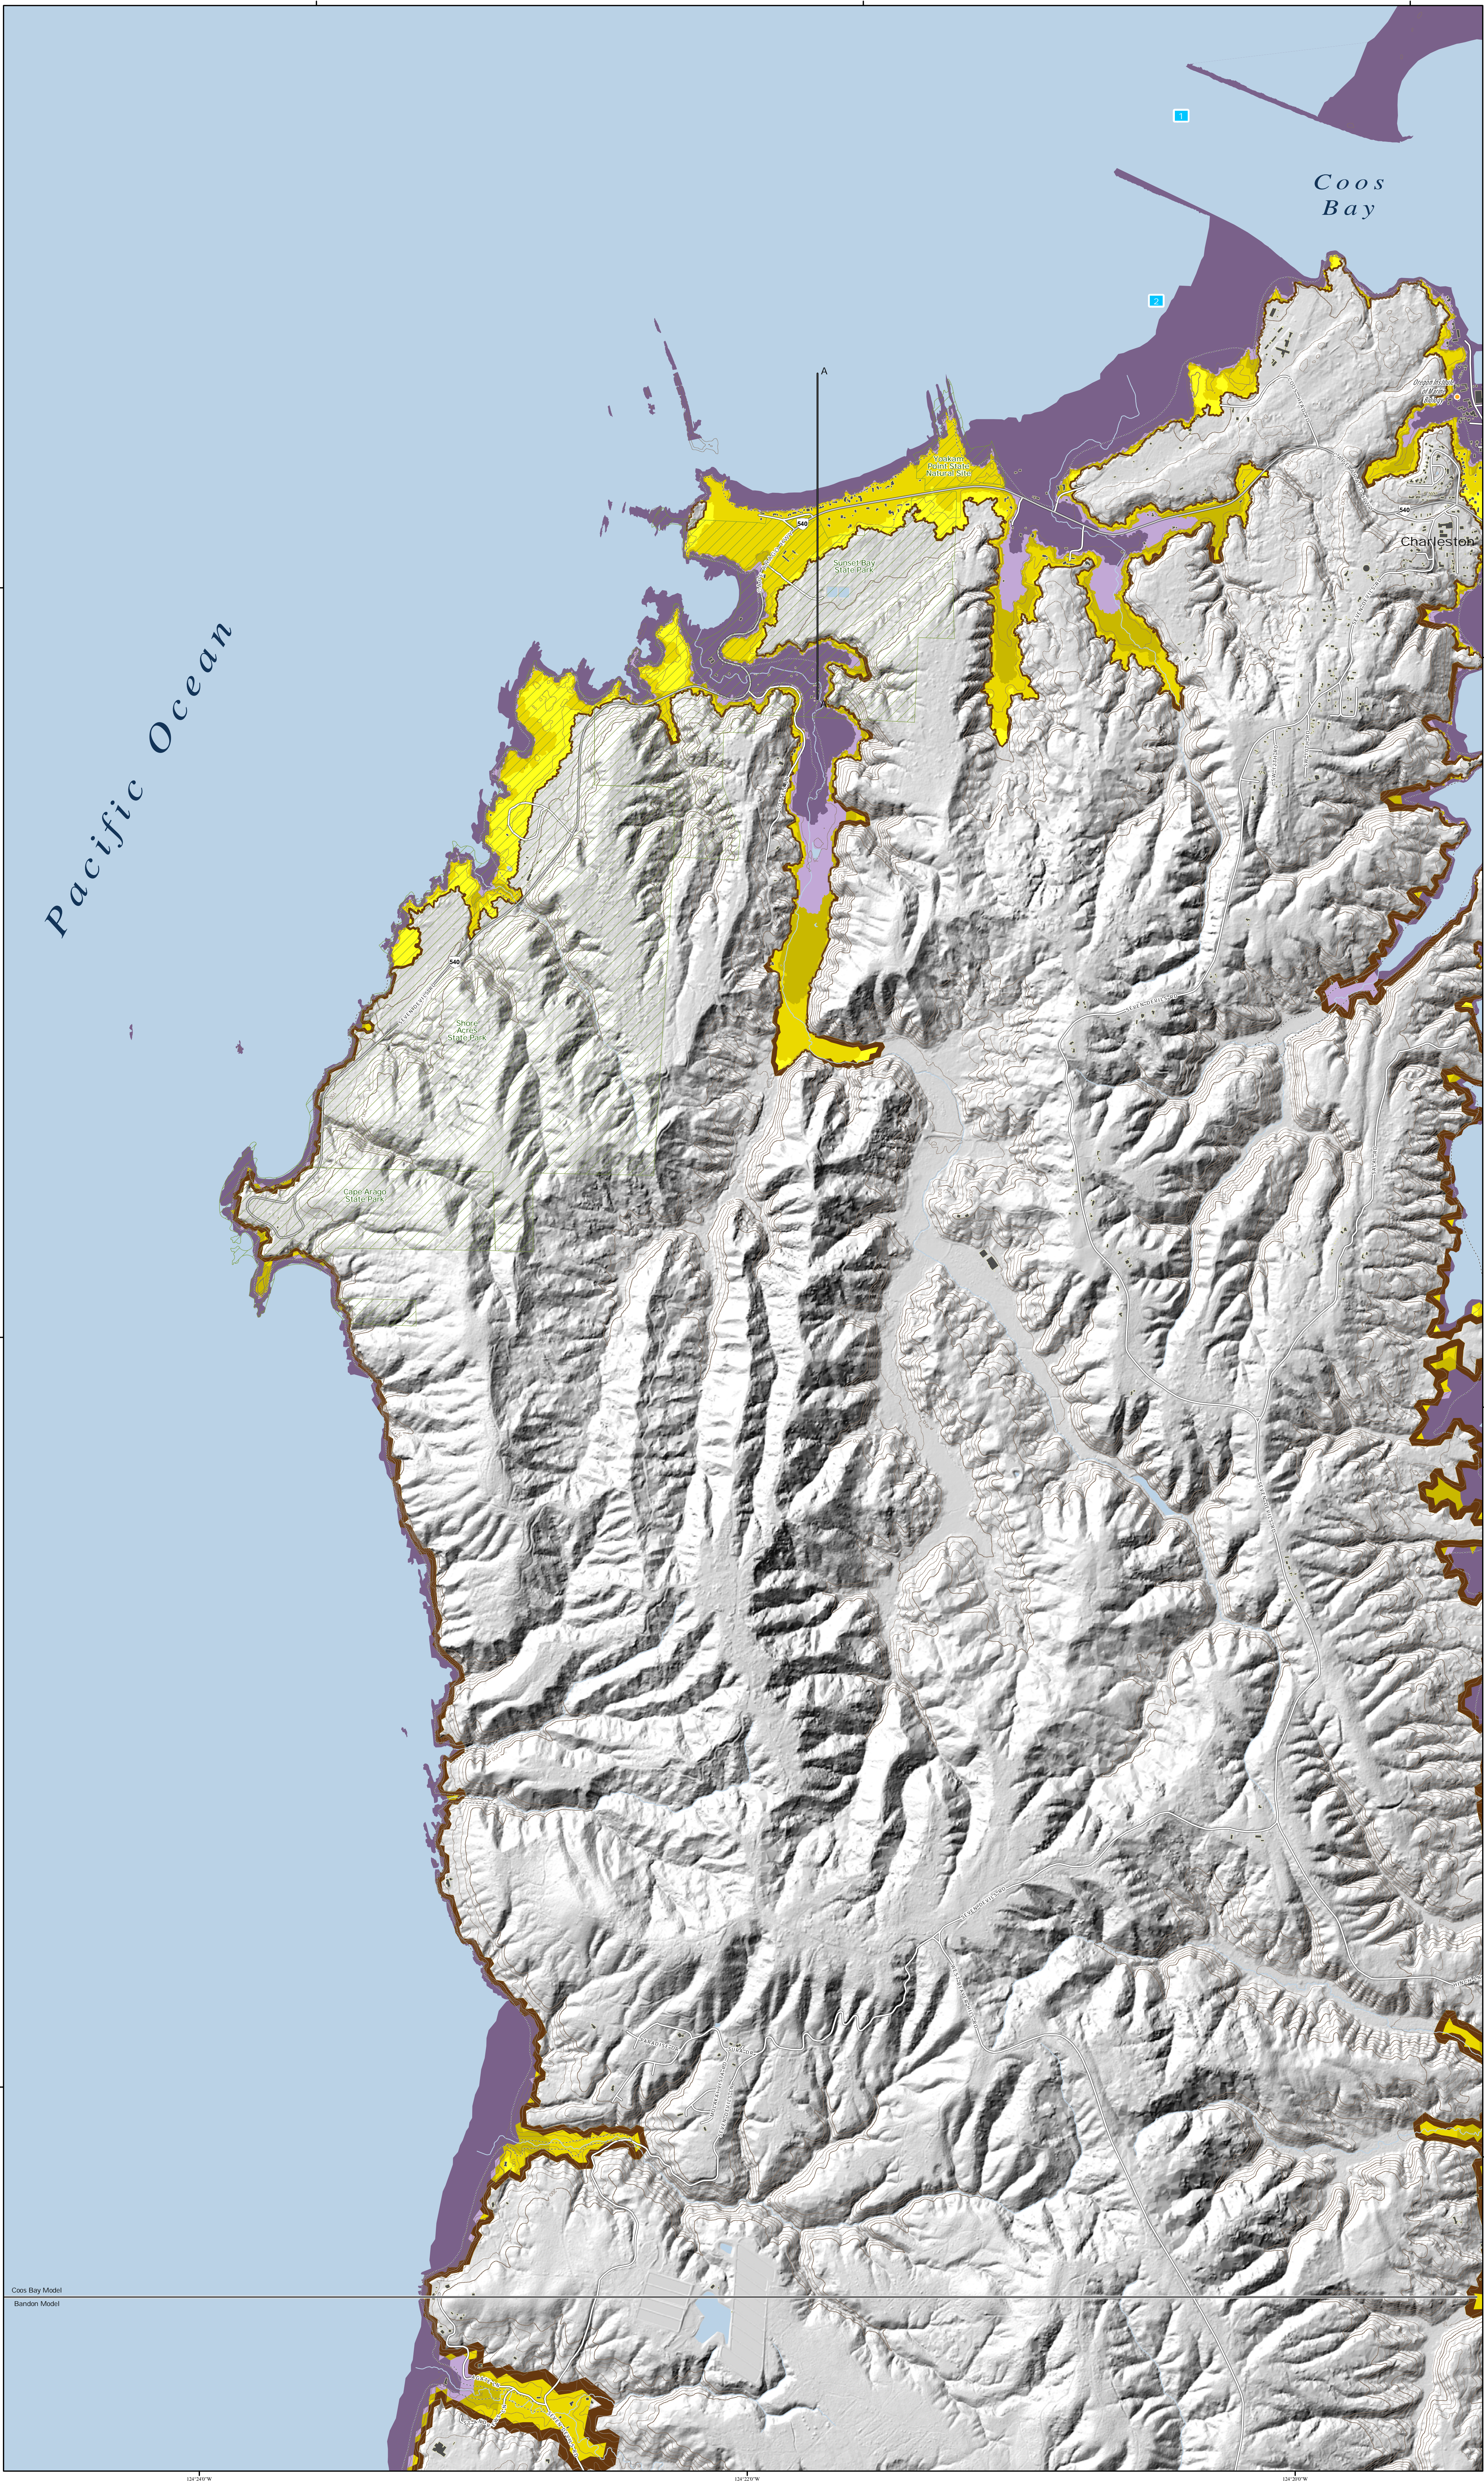

Earthquake Size	Average Slip Range (ft)	Maximum Slip Range (ft)	Time to Accumulate Slip (yrs)	Earthquake Magnitude
XXL	59 to 72	118 to 144	1,200	-9.1
XL	56 to 72	115 to 144	1,050 to 1,200	-9.1
L	36 to 49	72 to 98	650 to 800	-9.0
M	23 to 30	46 to 62	425 to 525	-8.9
S	13 to 16	30 to 36	300	-8.7
XXL Wet/Dry Zone				

Urban Growth Boundary	Fire Station
Building Footprint	Police Station
Simulated Gauge Station	School
Profile Location	Hospital/Urgent Care Clinic
Senate Bill 379 Line	U.S. Highway
State Park	State Highway
Elevation Contour (25 ft intervals up to 200 ft)	Improved Road

## Tsunami Inundation Map Index

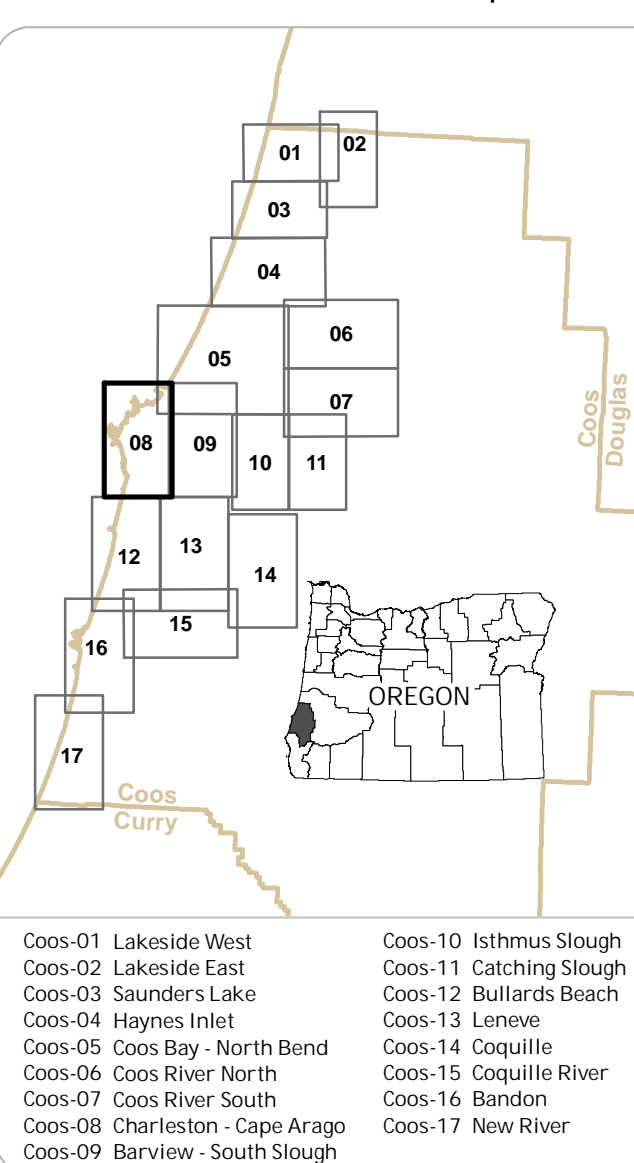


## Data References

Source Data:  
This map is based on hydrodynamic tsunami modeling by Joseph Zhang, Oregon Health and Science University, Portland, Oregon. Model data input were created by John T. Engle and George R. Priest, Department of Geology and Mineral Industries (DOGAMI), Portland, Oregon.  
Hydrology data, contours, critical facilities, and building footprints were created by DOGAMI. Senate Bill 379 line data were modified by Rachel R. Lyles Smith and Sean G. Pickner, DOGAMI, in 2011 (GIS file set, in press, 2012).  
Urban growth boundaries (2010) were provided by the Oregon Department of Land Conservation and Development (DLCD).  
Transportation data (2008) provided by Coos County were edited by DOGAMI to improve the spatial accuracy of the features or to add newly constructed roads not present in the original data layer.  
Lidar data are from DOGAMI Lidar Data Quadrangles: LDQ 2009-43124, CS-00000 and LDQ 2009-43124, CS-00000.  
Coordinate Systems: Oregon Statewide Lambert Conformal Conic; Unit: International Foot; Horizontal Datum: NAD 1983 HARN; Vertical Datum: NAVD 1988; Contours shown with geographic coordinates (latitude/longitude).

References:  
2007 Working Group on California Earthquake Probabilities (WGCEP), 2008. The Uniform California Earthquake Rupture Forecast, Version 2 (UCERF 2). U.S. Geological Survey Open-File Report 2007-1437 and California Geological Survey Special Report 203.  
Priest, G.R., 1995. Explanation of mapping methods and use of the tsunami hazard maps of the Oregon coast. Oregon Department of Geology and Mineral Industries Open-File Report OGI-95-01, 95 p.  
Priest, G.R., Goldfinger, C., Wang, K., Witter, R.C., Zhang, Y., and Beggs, A.M., 2009. Tsunami hazard assessment of the northern Oregon coast: a multi-alternative approach based at Cannon Beach, Clatsop County, Oregon. Oregon Department of Geology and Mineral Industries Special Paper 41, 81 p.  
Witter, R.C., Zhang, Y., Wang, K., Priest, G.R., Goldfinger, C., Shimizu, L.L., Engle, J.T., and Farris, P.A., 2011. Simulating tsunami inundation at Cannon Beach, Clatsop County, Oregon, using hydrophysical Cascadia and Alaska earthquake scenarios. Oregon Department of Geology and Mineral Industries Special Paper 43, 43 p.

Software: Esri ArcGIS® 10.0, Microsoft® Excel®, and Adobe® Illustrator®.  
Funding: This map was funded under award #NA09RWS4610014 by the National Oceanic and Atmospheric Administration (NOAA) through the National Tsunami Hazard Mitigation Program.  
Map Data Creation/Development:  
Tsunami Hazard Assessment: George R. Priest, Laura L. Shimizu, Daniel L. Coe, Duane A. Ferry, Sean G. Pickner, Rachel R. Lyles Smith, Average Data: Katelyn L.B. Hughes, Sean G. Pickner.  
Map Production:  
Cartography: Katelyn L.B. Hughes, Sean G. Pickner, Taylor E. Wamble, Editing: Don W.T. Lewis, Rachel R. Lyles Smith, Revision: Deborah A. Schuster.  
Date: 07/17/2012



Nature of the Northwest  
For copies of the publication contact:  
Nature of the Northwest Information Center  
800 NW 1st Avenue, Suite 200  
Portland, Oregon 97208  
Phone: 503-459-5555  
Fax: 503-459-5556  
http://www.naturenw.org