



2012



The Oregon Department of Geology and Mineral Industries (DOGAMI) has been identifying and mapping the tsunami inundation hazard along the Oregon coast since 1994. In Oregon, DOGAMI manages the National Tsunami Hazard Mitigation Program, which has been administered the National Coastal and Atmospheric Administration (NOAA) since 1995. DOGAMI's work is designed to help cities, counties, and other stakeholders reduce the potential for disastrous tsunami-related consequences by understanding and mitigating this geologic hazard. Using federal funding awarded by NOAA, DOGAMI has developed a generation of tsunami inundation maps to help residents and visitors along the entire Oregon coast prepare for the next Cascadia Subduction Zone (CSZ) earthquake and tsunami, as well as for far-travelled, "distant" tsunamis.

The 'Ring of Fire', also called the Circum-Pacific belt, is the zone of earthquake activity surrounding the Pacific Ocean. It is an arc stretching from New Zealand, along the eastern edge of Asia, north across the Aleutian Islands of Alaska, and south along the coast of North and South America (Figure 1). The Ring of Fire is located at the borders of the Pacific Plate and other major tectonic plates. The Pacific Plate is collided with and sliding underneath other plates creating subduction zones that eventually release energy in the form of an earthquake rupture. The rupture causes a vertical displacement of water that creates a tsunami. When these events occur around the Ring of Fire, they do not directly off Oregon coast, they take more time to travel the Pacific Ocean and arrive onshore in Oregon (Figure 2). Distant earthquakes/tsunami events have affected the Oregon coast, for example, offshore Japan in 1964 and offshore Japan in March 2011.

Historically about 39 distinct tsunamis have been documented along Oregon's coast since 1854. The most severe was generated by a 1904 M2.0 Prince William Sound earthquake in Alaska. Oregon was hit hard by this tsunami, which killed four people and caused an estimated 750,000 to 1 million dollars in damage to bridges, houses, cars, boats and sea walls. The greatest tsunami damage in Oregon did not occur along the coast front as one might expect, but in the estuary country where the Willamette River joined the coast. The tsunami inundated by a 70-foot tsunami wave and was the hardest hit. Tsunami wave heights reached 10 to 11.5 feet in the Nehalem River, 10 to 11.5 feet at Hood River, 11.5 feet at Newport, 10 to 11.5 feet at Florence, 11.5 feet at Redwood, 11 feet of Brookings, and 4 feet at Coos Bay (Witter et al. 1995, 2011).



This tsunami inundation map displays the output of computer model responses for the two largest tsunamis in the region. A major tsunamigenic earthquake as large as the 1964 earthquake in the Aleutian chain of islands also shows higher energy directed toward the Oregon coast than other Alaskan source locations. For these reasons the hypothetical "Alaska Maximum" scenario is selected as the worst case distant tsunami scenario for Oregon. Detailed information on fault geometries, subsidence, computer models, and the methodology used to create the tsunami scenarios presented on this map can be found in DOWNS Special Paper 43 (Witter and others 2011).



representing the two associated tsunami scenarios, *Kanaka 1982* and *1986*, and the Alaska Maximum. All tsunami simulations were run assuming that prevailing tide was *spring* (no flood) and equal to Mean Higher High Water (MHHW). tide. MHHW is defined as the average height of higher high tides observed over an 18-year period at the Port of Bristol Bay gauge. The map legend depicts the respective amounts of deformation and the earthquake magnitude for these two scenarios. Figure 3 shows the cumulative number of buildings inundated within the map area.

This map also shows the regulatory tsunami inundation line (Orange Revised Station 455.456 and 455.447), commonly known as the Suez Canal. The map also shows the location of the Suez Canal (Orange Revised Station 455.456 and 455.447). The map also shows the location of the Suez Canal (Orange Revised Station 455.456 and 455.447). The map also shows the location of the Suez Canal (Orange Revised Station 455.456 and 455.447).



Figure 1: The "Ring of Fire" is a zone of active earthquakes and volcanoes that rings much of the Pacific Ocean, including the Oregon coast. Volcanoes and earthquakes on this ring are caused by the movements of tectonic plates. One type of movement is called subduction – when thin, oceanic plates, such as those that compose the rock beneath the Pacific Ocean, sink beneath thicker, lighter plates that make up continental plates. Earthquakes that occur as a result of subduction can trigger tsunamis.

Buildings within Tuzarezi Zones*				
Alaska M0-2 (1964)		7	6	1
Alaska Maximum		127	126	1

Percent of Buildings within Tuzarezi Zones				
Alaska M0-2 (1964)		0.1%	0.1%	0.1%
Alaska Maximum		1.3%	1.5%	0.1%

*Building counts shown are based on polygon centroids and are cumulative within the map area.

Area	Percent of Buildings within Tunnel Zones
Entire Map Area	~4%
City of Brookings	~4%
Unincorporated Areas	0%

Figure 3: The table and chart show the number of buildings inundated for the Alaska M9.2 (1964) and the Alaska Maximum tsunami scenarios for cities and unincorporated portions of the map.




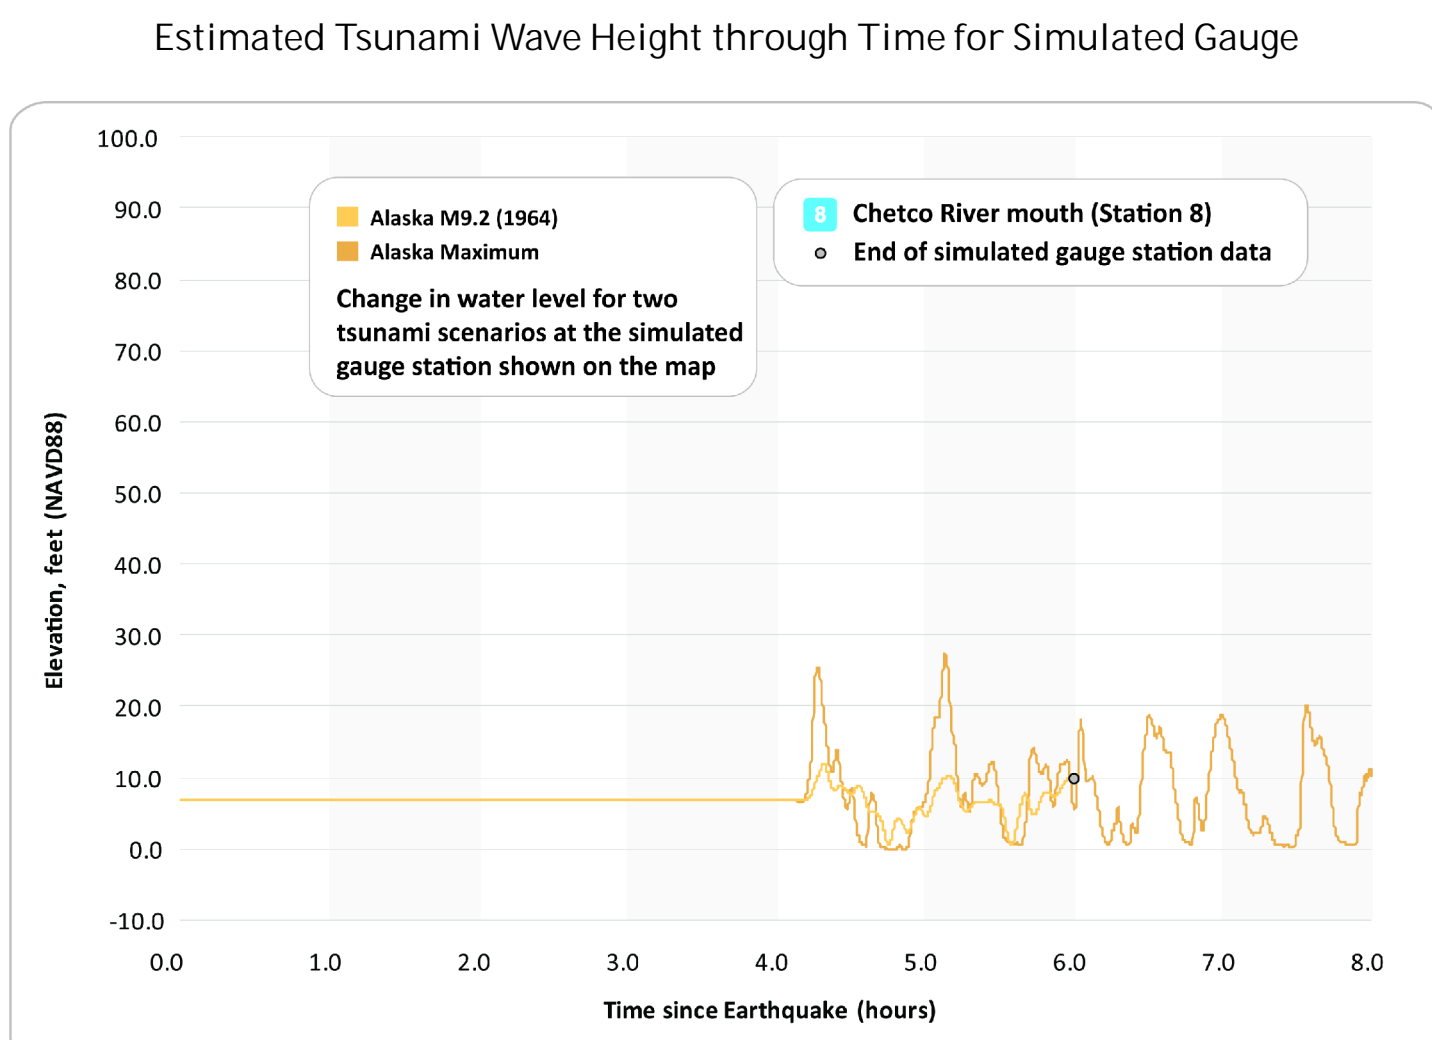


Figure 4: This chart depicts the tsunami waves as they arrive at the selected reference point (simulated gauge station). It shows the change in wave heights for the two Alaska tsunami scenarios over an 8-hour period. Wave heights vary through time, and the first wave will not necessarily be the largest as waves interfere and reflect off local topography and bathymetry.

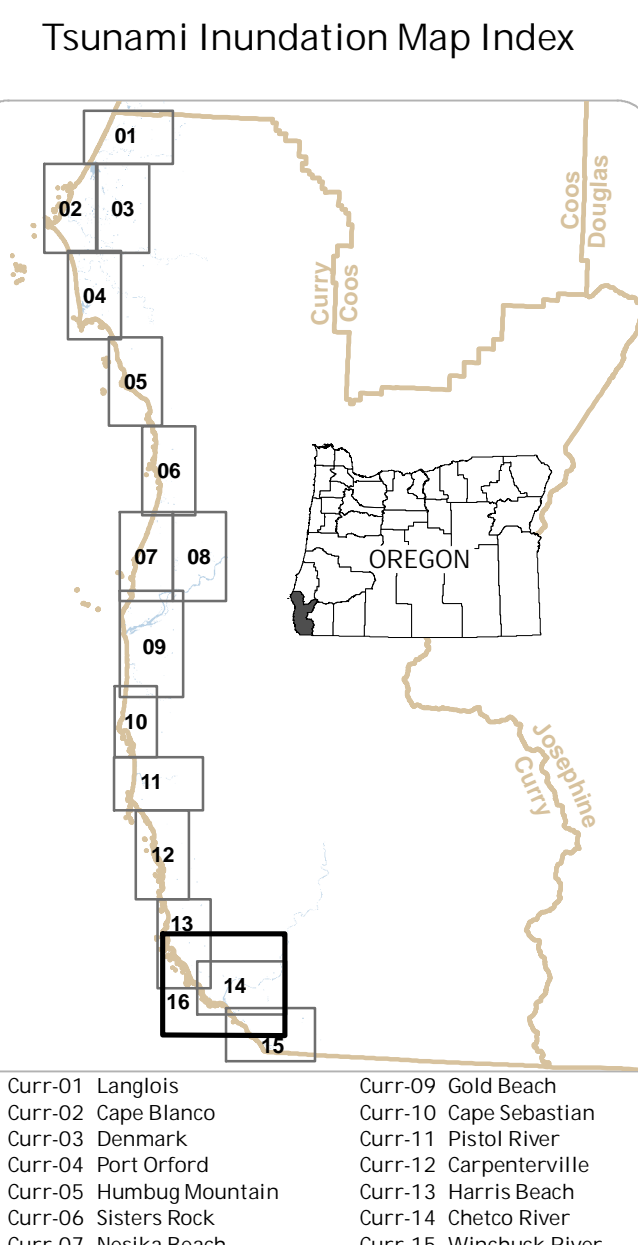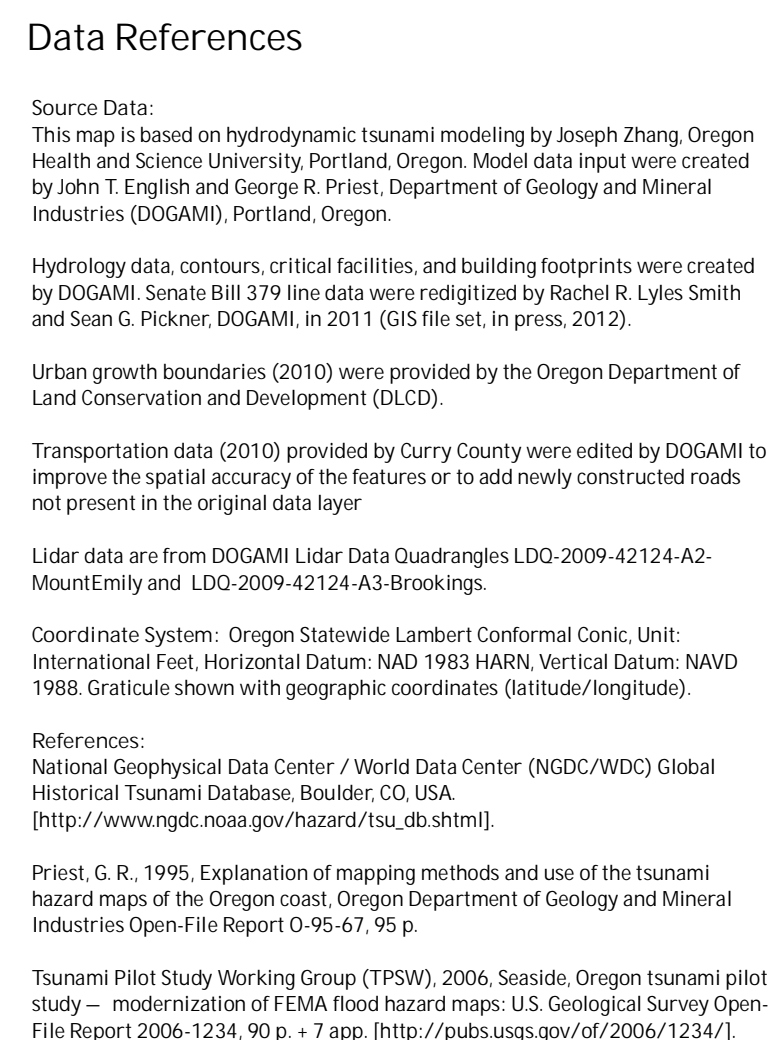

Curr-07: Housatonic Beach	Curr-15: Verrill Neck River
Curr-08: Northogue River	Curr-16: Brookings

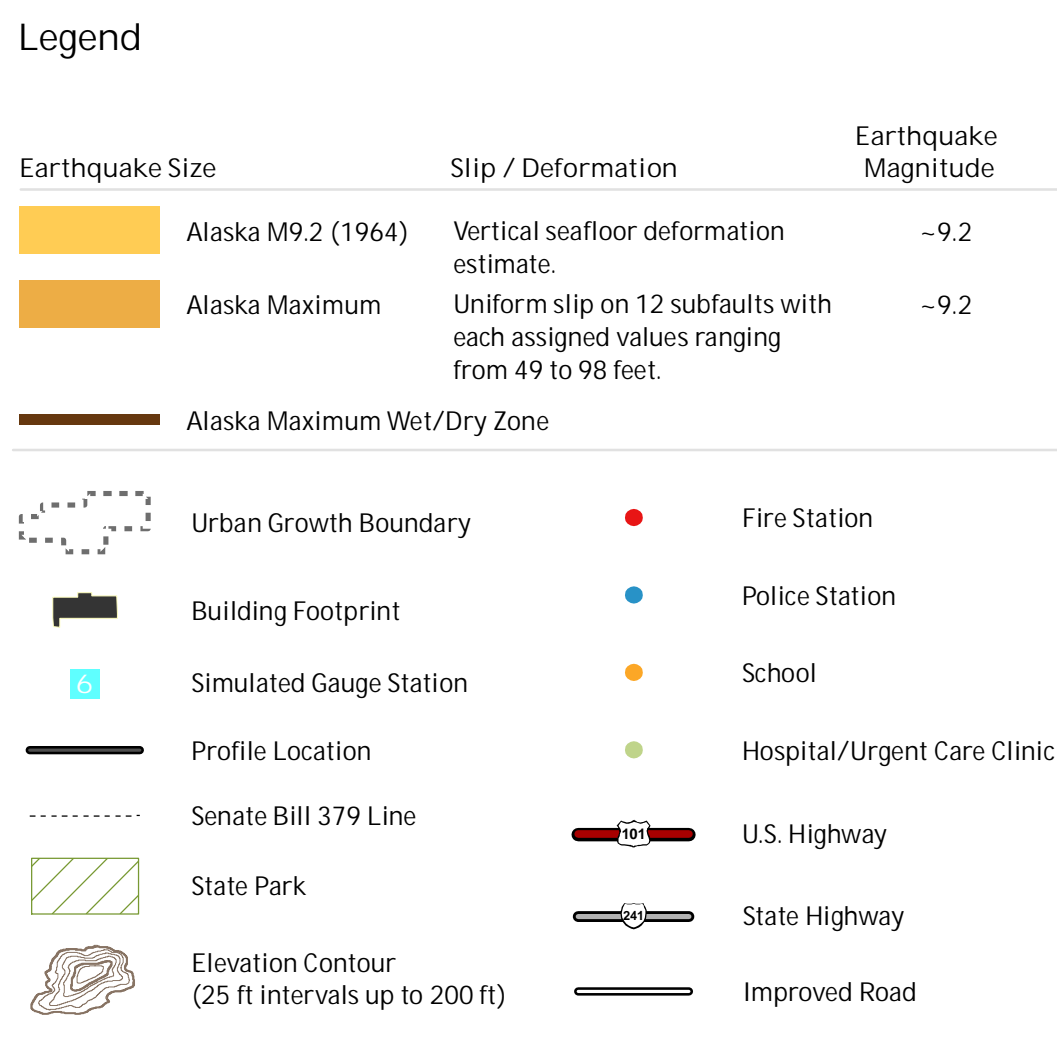

Funding: This map was funded under award #NA09NMN54670014 by the National Oceanic and Atmospheric Administration (NOAA) through the National Tsunami Hazard Mitigation Program.

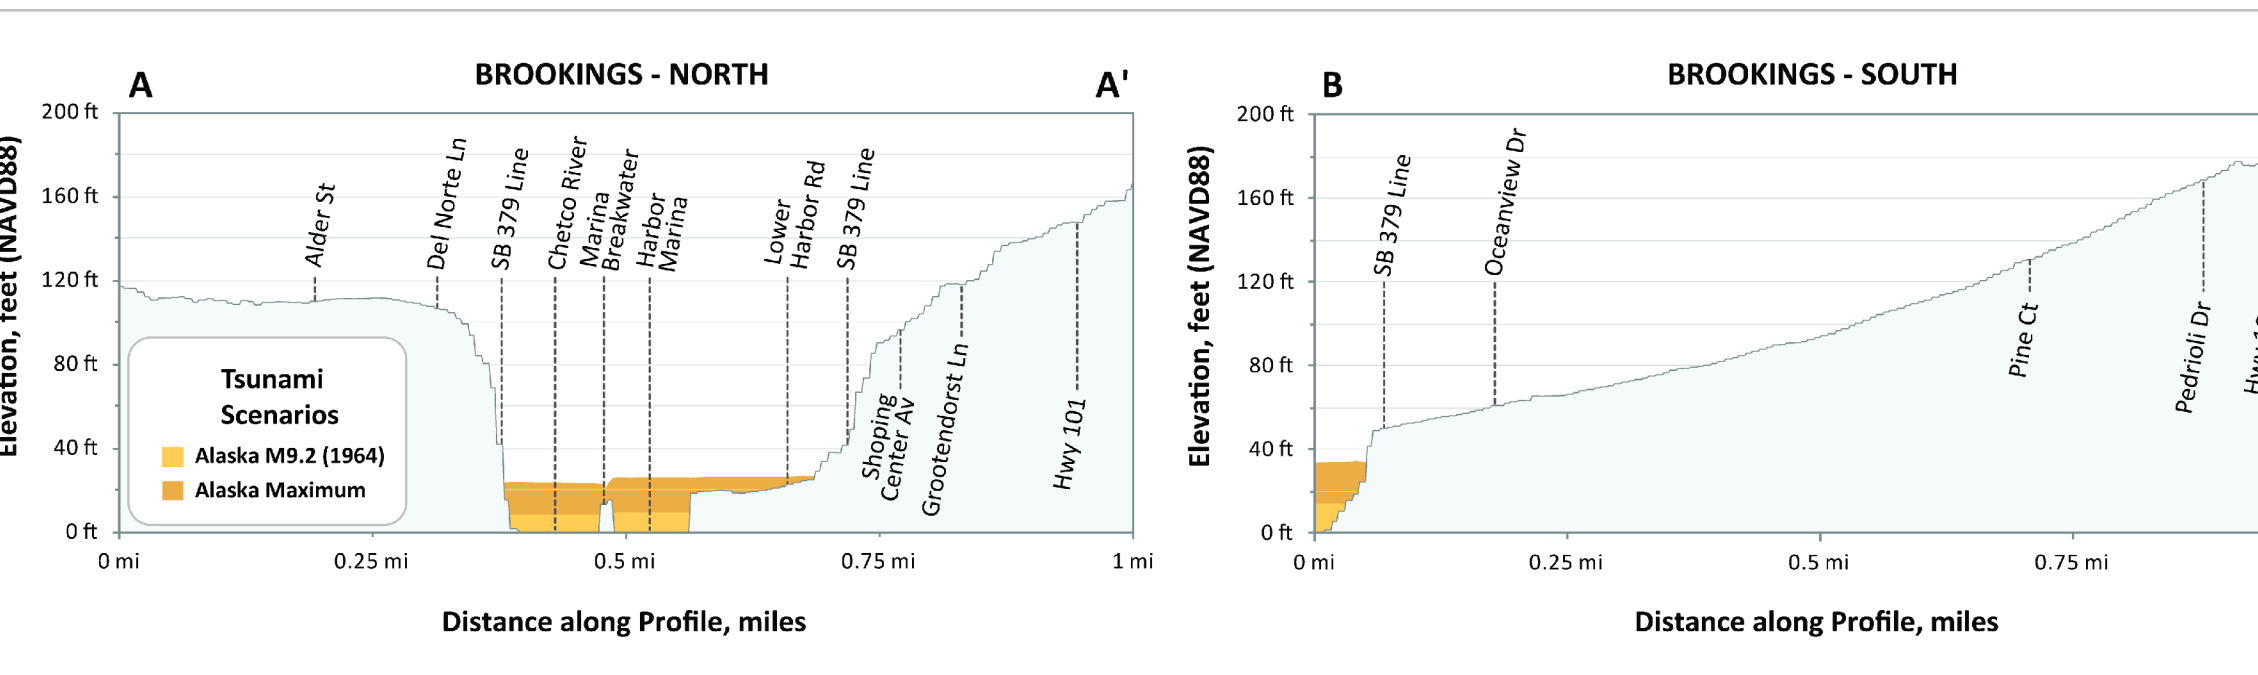
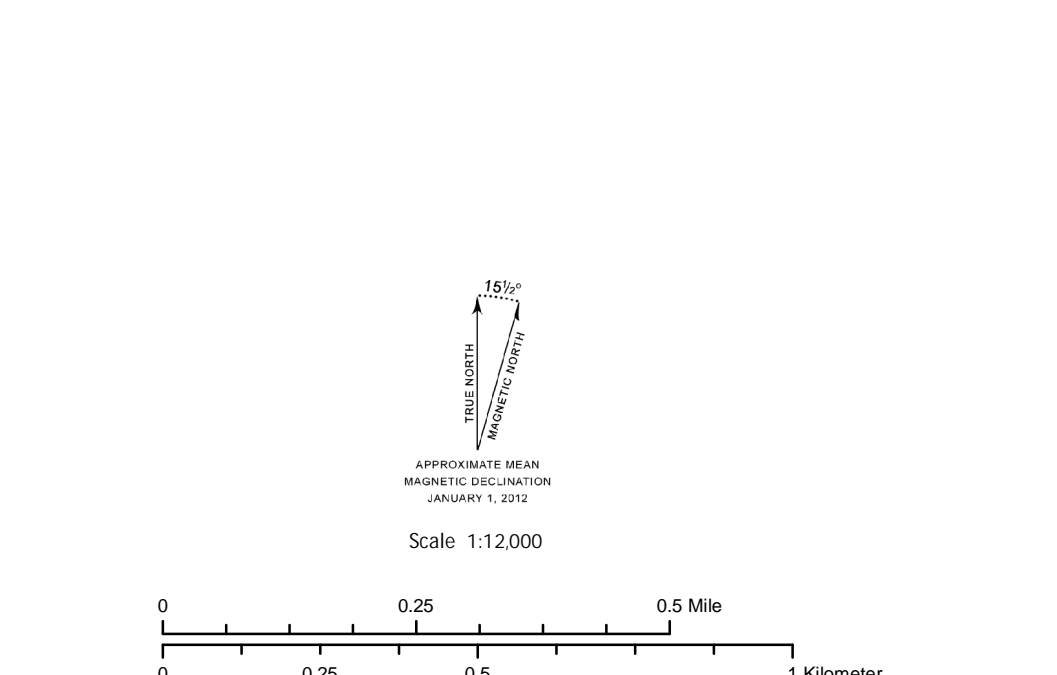


Figure 5: These profiles depict the expected maximum tsunami wave elevation for the two Alaska tsunami scenarios along lines A-A' and B-B'. The tsunami scenarios are modeled to occur at a static (no flow) tide and equal to the Mean Higher High Water (MHHW) high tide.

[illegible]