



Map Explanation

This tsunami inundation map displays the output of computer models representing the two selected tsunami scenarios: Alaska M9.2 (1964) and the Alaska Maximum. All tsunami simulations were run assuming that prevailing tide was static (no flow) and equal to Mean Higher High Water (MHHW) tide; MHHW is defined as the average height of the higher high tides observed over an 18-year period at the Yakutat Bay (Central Coast) model tide gauge. The map legend depicts the respective amounts of deformation and the earthquake magnitude for these two scenarios. Figure 3 shows the cumulative number of buildings inundated within the map area.

The computer simulation model output is provided to DOGAMI as millions of points with values that indicate whether the location of each point is wet or dry. These points are converted to wet and dry contour lines that form the extent of inundation. The transition area between the wet and dry contour lines is termed the Wet/Dry Zone, which equates to the amount of error in the model when determining the maximum inundation for each scenario. Only the Alaska Maximum Wet/Dry Zone is shown on this map.

Time Series Graphs and Wave Elevation Profiles: In addition to the tsunami scenarios, the computer model produces time series data for "gauge" locations in the area. These points are simulated gauge stations that record the time, in seconds, of the tsunami wave arrival and the wave height observed. It is especially noteworthy that the greatest wave height and velocity observed are not necessarily associated with the first tsunami wave to arrive onshore. Therefore evacuees should not assume that the tsunami event is over until the proper authorities have sounded the all-clear at the end of the evacuation. Figure 4 depicts the tsunami waves as they arrive at a simulated gauge station. Figure 5 depicts the overall wave height and inundation extent for the two scenarios at the profile locations shown on this map.

Time Series Graphs and Wave Elevation Profiles: In addition to the tsunami scenarios, the computer model produces time series data for "gauge" locations in the area. These points are simulated gauge stations that record the time, in seconds, of the tsunami wave arrival and the wave height observed. It is especially noteworthy that the greatest wave height and velocity observed are not necessarily associated with the first tsunami wave to arrive onshore. Therefore evacuees should not assume that the tsunami event is over until the proper authorities have sounded the all-clear at the end of the evacuation. Figure 4 depicts the tsunami waves as they arrive at a simulated gauge station. Figure 5 depicts the overall wave height and inundation extent for the two scenarios at the profile locations shown on this map.

	Entire Map Area	Reedspoot	Unincorporated Areas
Total Buildings	3,045	2,508	447
Buildings within Tsunami Zones*			
Alaska MS-2 (1964)	32	23	9
Alaska Maximum	240	102	138
Percent of Buildings within Tsunami Zones			
Alaska MS-2 (1964)	1.1%	0.9%	2.0%
Alaska Maximum	7.9%	3.9%	30.9%

*Building counts shown are based on polygon centroids and are cumulative within the map area


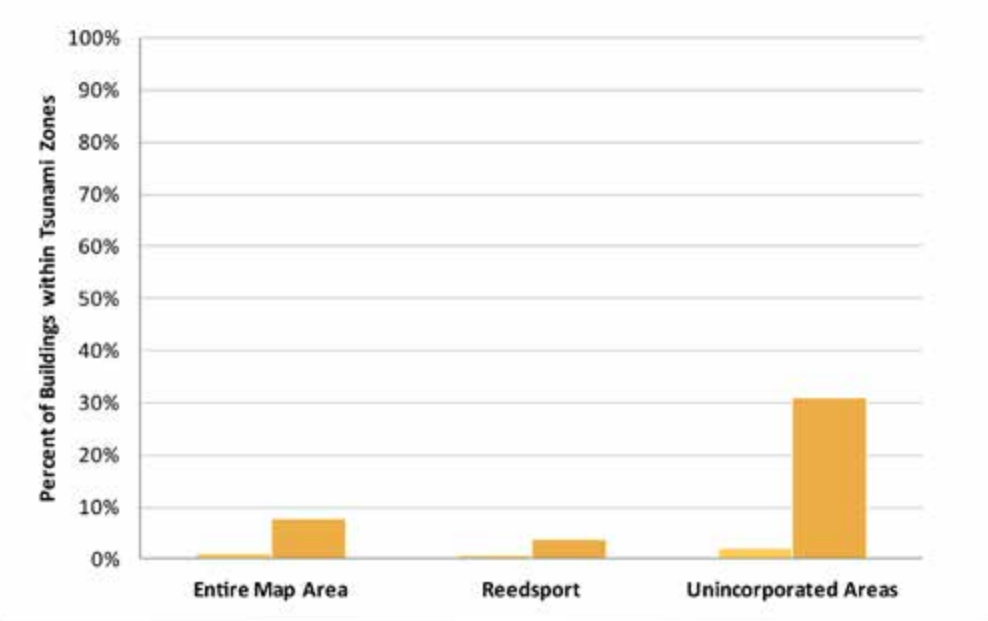


Figure 3: The table and chart show the number of buildings inundated for the Alaska M9.2 (1964) and the Alaska Maximum tsunami scenarios for cities and unincorporated portions of the map.

Figure 4: This chart depicts the tsunami waves as they arrive at the selected reference point (simulated gauge station). It shows the change in wave heights for the two Alaska tsunami scenarios over an 8-hour period. Wave heights vary through time, and the first wave will not necessarily be the largest as waves interfere and reflect off local topography and bathymetry. Any absence of data indicates periods for which tsunami inundation has not yet reached or has receded from the station location and dry land is exposed.

Figure 5: These profiles depict the expected maximum tsunami wave elevation for the two Alaska tsunami scenarios along lines A-A' and B-B'. The tsunami scenarios are modeled to occur at a static (no flow) tide and equal to the Mean Higher High Water (MHHW) high tide.

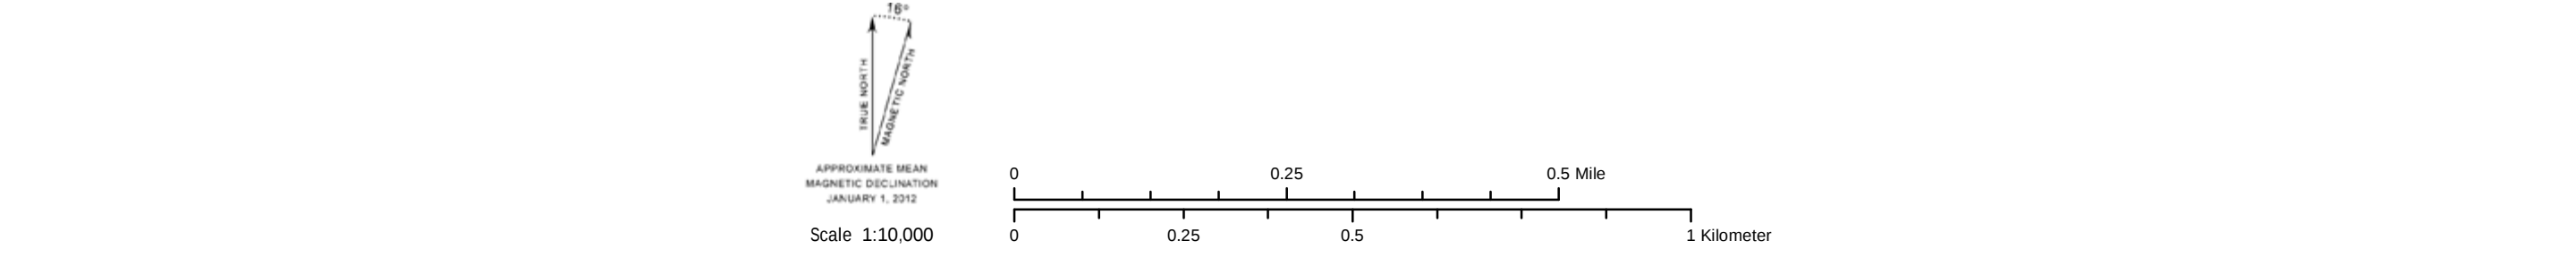

Earthquake Size	Slip / Deformation	Magnitude
	Alaska M9.2 (1964)	-9.2
	Alaska M8.2 (Maximum)	-9.2
	Vertical seafloor deformation estimate.	
	Uniform slip on 12 subfaults with each assigned values ranging from 45 to 50 feet.	
	Alaska Maximum Wet/Dry Zone	

	Urban Growth Boundary		Fire Station
	Building Footprint		Police Station
	Simulated Gauge Station		School
	Profile Location		Hospital / Urgent Care
	Senate Bill 379 Line		U.S. Highway
	State Park		State Highway
	Elevation Contour (25 ft intervals up to 200 ft)		Improved Road

Map of the Douglas Coos area in Oregon, showing numbered locations 01 through 09. Location 04 is highlighted with a black border. The map includes labels for 'Lane Douglas' and 'Douglas Coos'. An inset map shows the location of Douglas Coos within the state of Oregon.

Doug 01	Sitkoos Lake	Doug-06	Umpqua River West
Doug 02	Tahentahick Lake	Doug-07	Surfiah Springs
Doug 03	Gardiner	Doug-08	Umpqua River East
Doug 04	Rehrestrop	Doug 09	Clear Lake
Doug 05	East Gardiner		

[illegible]