



STATE OF OREGON
DEPARTMENT OF GEOLOGY AND MINERAL INDUSTRIES
www.OregonGeology.org
Larry Givens, Governing Board Chair
Vicki S. McConnell, Director and State Geologist
Don W.T. Lewis, Assistant Director
Rachel R. Lyles Smith, Project Operations Manager
Ian P. Madin, Chief Scientist

Introduction

The Oregon Department of Geology and Mineral Industries (DOGAMI) has been identifying and mapping the tsunami inundation hazard along the Oregon coast since 1994. In Oregon, DOGAMI manages the National Tsunami Hazard Mitigation Program, which has been administered by the National Oceanic and Atmospheric Administration (NOAA) since 1995. DOGAMI's work is designed to help cities, counties, and other sites in coastal areas reduce the potential for disastrous, tsunami-related consequences by understanding and mitigating this geologic hazard. Using federal funding awarded by NOAA, DOGAMI has developed a new generation of tsunami inundation maps to help residents and visitors along the entire Oregon coast prepare for the next Cascadia Subduction Zone (CSZ) earthquake and tsunami.

The CSZ is the tectonic plate boundary between the North American Plate and the Juan de Fuca Plate (Figure 1). These plates are converging at a rate of about 1.5 inches per year, but the movement is not smooth and continuous. Rather, the plates lock in place, and unreleased energy builds over time. At intervals, this accumulated energy is violently released in the form of a megathrust earthquake rupture, where the North American Plate suddenly slips westward over the Juan de Fuca Plate. This rupture causes a vertical displacement of water that creates a tsunami (Figure 2). Similar rupture processes and tsunamis have occurred elsewhere on the planet where subduction zones exist; for example, offshore Chile in 1960 and 2010, offshore Alaska in 1964, near Sumatra in 2004, and offshore Japan in March 2011.

CSZ Frequency Comprehensive research of the offshore geologic record indicates that at least 19 major ruptures of the full length of the CSZ have occurred off the Oregon coast over the past 10,000 years (Figure 3). All 19 of these full-rupture CSZ events were likely magnitude 8.9 to 9.2 earthquakes (Witter and others, 2011). The most recent CSZ event happened approximately 300 years ago on January 26, 1700. Sand deposits carried onshore and left by the 1700 event have been found 1.2 miles inland, older tsunami sand deposits have also been discovered in estuaries 6 miles inland. As shown in Figure 3, the range in time between these 19 events varies from 110 to 150 years, with a median time interval of 400 years. In 2008 the United States Geological Survey (USGS) released the results of a study announcing that the probability of a magnitude 8.9 CSZ earthquake occurring over the next 30 years is 10% and that such earthquakes occur about every 500 years (WGCEP, 2008).

CSZ Wave Generation The sizes of the earthquake and its resultant tsunami are primarily driven by the amount and geometry of the slip that takes place when the North American Plate slips westward over the Juan de Fuca Plate during a CSZ event. DOGAMI has modeled a wide range of earthquake and tsunami sizes that take into account different fault geometries that could amplify the amount of seawater displacement and increase tsunami inundation. Seismic geophysical profiles show that there may be a steep splay fault running nearly parallel to the CSZ but closer to the Oregon coastline (Figure 1). The effect of this splay fault moving during a full-rupture CSZ event would be an increase in the amount of vertical displacement of the Pacific

Ocean, resulting in an increase of the tsunami inundation onshore in Oregon. DOGAMI has also incorporated physical evidence that suggests that portions of the coast may drop 4 to 10 feet during the earthquake; this effect is known as subsidence. Detailed information on fault geometries, subsidence, computer models, and the methodology used to create the tsunami scenarios presented on this map can be found in DOGAMI Special Papers 41 (Priest and others, 2009) and 43 (Witter and others, 2011).

Map Explanation

This tsunami inundation map displays the output of computer models representing the selected tsunami scenarios, all of which include the earthquake-produced subsidence and the tsunami-amplifying effects of the splay fault. Each scenario assumes that a tsunami occurs at Mean Higher High Water (MHHW) tide. MHHW is defined as the average height of the higher high tides observed over an 18-year period at the Garibaldi tide gauge. To make it easier to understand this scientific material and to enhance the educational aspects of hazard mitigation and response, the five scenarios are labeled as "T-shirt sizes" ranging from Small, Medium, Large, Extra Large to Extra Extra Large (S, M, L, XL, XXL). The map legend depicts the respective amounts of slip, the frequency of occurrence, and the earthquake magnitude for these five scenarios. Figure 4 shows the cumulative number of buildings inundated within the map area.

The computer simulation model output is provided to DOGAMI as millions of points with values that indicate whether the location of each point is wet or dry. These points are converted to wet and dry contour lines that form the extent of inundation. The transition area between the wet and dry contour lines is termed the Wet/Dry Zone, which equates to the amount of error in the model when determining the maximum inundation for the each scenario. Only the XXL Wet/Dry Zone is shown on this map.

This map also shows the regulatory tsunami inundation line (Oregon Revised Statutes 455.446 and 455.447), commonly known as the Senate Bill 379 line. Senate Bill 379 (1995) instructed DOGAMI to establish the area of expected tsunami inundation based on scientific evidence and tsunami modeling in order to prohibit the construction of new essential and special occupancy structures in this tsunami inundation zone (Priest, 1995).

Time-Slice Graphs and Water Elevation Profiles In addition to the tsunami scenarios, the computer model produces time series data for "gauge" locations in the area. These points are simulated gauge stations that record the time, in seconds, of the tsunami wave arrival and the wave height observed. It is especially noteworthy that the greatest wave height and velocity observed are not necessarily associated with the first tsunami wave to arrive onshore. Therefore evacuees should not assume that the tsunami event is over until the proper authorities have sounded the all-clear signal at the end of the evacuation. Figure 5 depicts the tsunami waves as they arrive at a simulated gauge station. Figure 6 depicts the overall wave height and inundation extent for all five scenarios at the profile locations shown on this map.

Cascadia Subduction Zone Setting


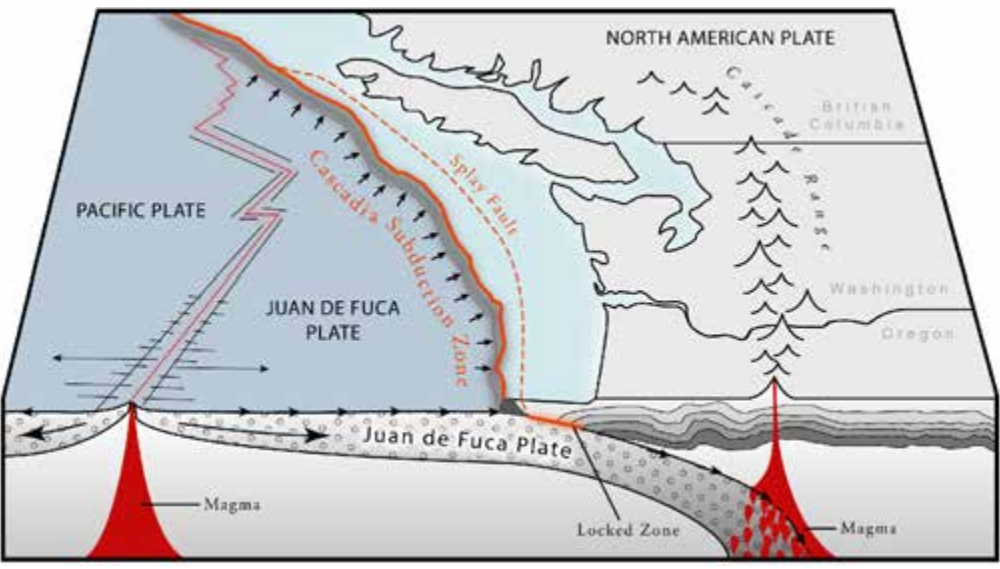


Figure 1: This block diagram depicts the tectonic setting of the region. See Figure 2 for the sequence of events that occur during a Cascadia Subduction Zone megathrust earthquake and tsunami.

How Tsunamis Occur

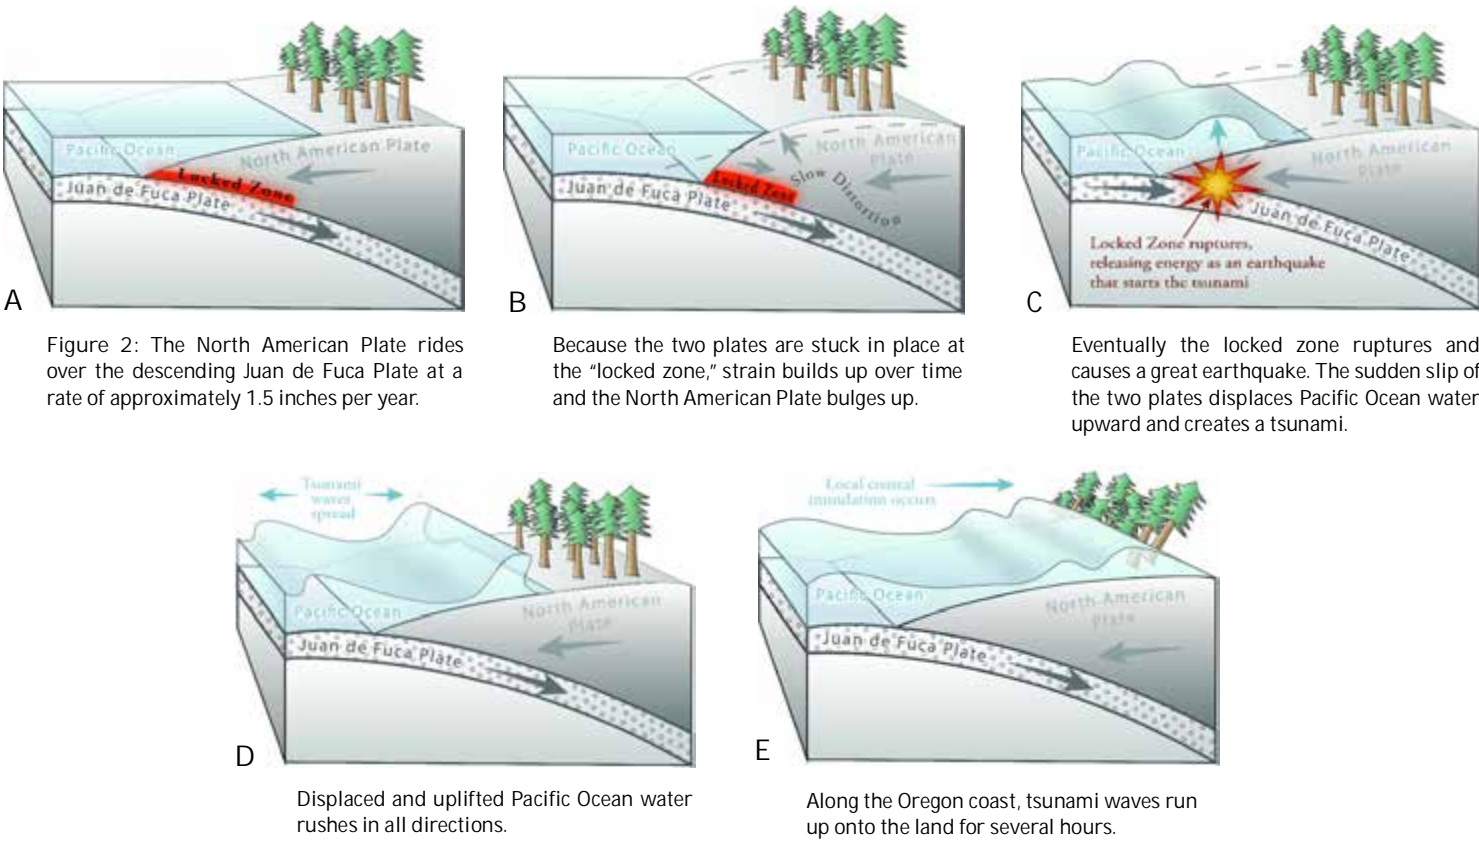

Occurrence and Relative Size of Cascadia Subduction Zone Megathrust Earthquakes

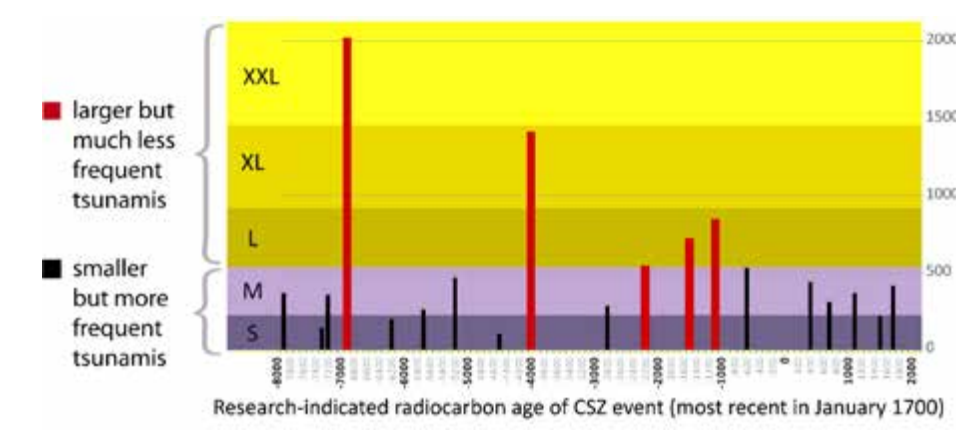


Figure 3: This chart depicts the timing, frequency, and magnitude of the last 19 great Cascadia Subduction Zone events over the past 10,000 years. The most recent event occurred on January 26, 1700. The 1700 event is considered to be a "medium-sized" event. This chart was created to create this chart from research that examined the many submarine landslides, known as "hummocks," that are triggered only by these great earthquakes (Witter and others, 2011). The lower correlation is "the bigger the hummock, the bigger the earthquake."

Buildings within Tsunami Inundation Zones

	Entire Map Area	City of Garibaldi	City of Rockaway Beach	Unincorporated Areas
Total Buildings	5,911	50	2,498	363
Buildings Within Tsunami Zones*				
Small	709	0	518	191
Medium	2,051	0	1,345	386
Large	2,453	0	2,117	336
Extra Large	2,662	4	2,314	344
Extra Extra Large	2,683	5	2,333	345

	Small	Medium	Large	Extra Large	Extra Extra Large
Percent of Buildings Within Tsunami Zones					
Small	24.4%	0.0%	20.7%	52.6%	
Medium	70.3%	0.0%	69.9%	84.3%	
Large	84.3%	0.0%	84.7%	92.6%	
Extra Large	91.4%	8.0%	92.6%	94.8%	
Extra Extra Large	92.2%	10.0%	93.4%	95.0%	

*Building counts shown are based on polygon centroids and are cumulative within the map area.

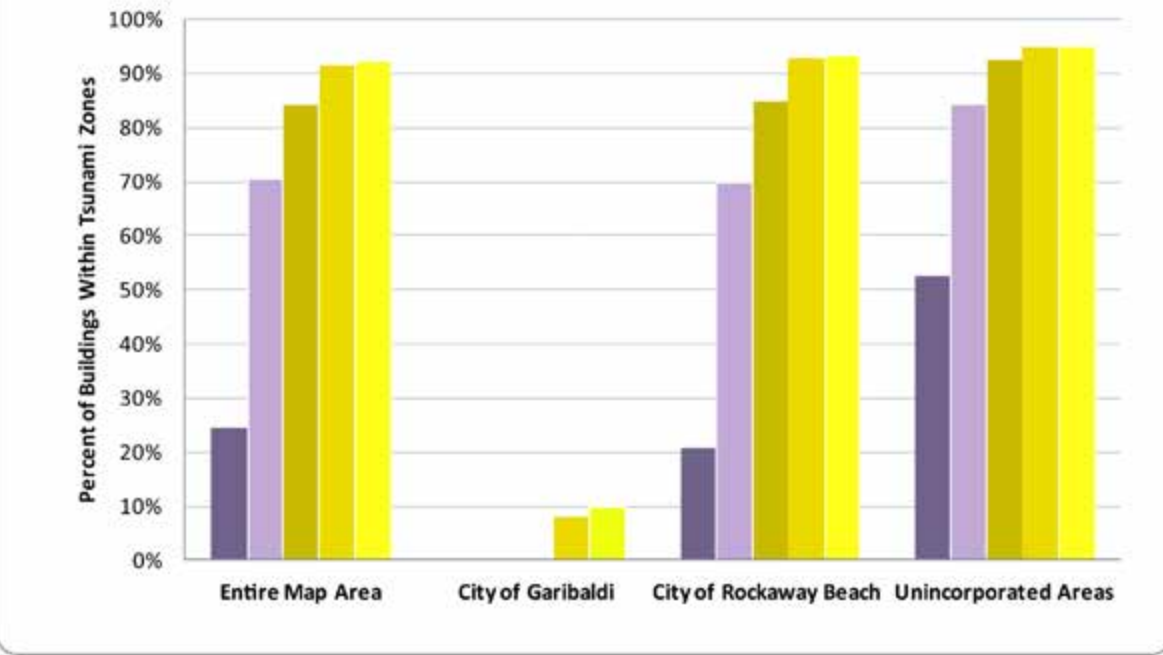


Figure 4: The table and chart show the number of buildings inundated for each "T-shirt size" scenario for cities and unincorporated portions of the map.

Estimated Tsunami Wave Height through Time for Simulated Gauge Station

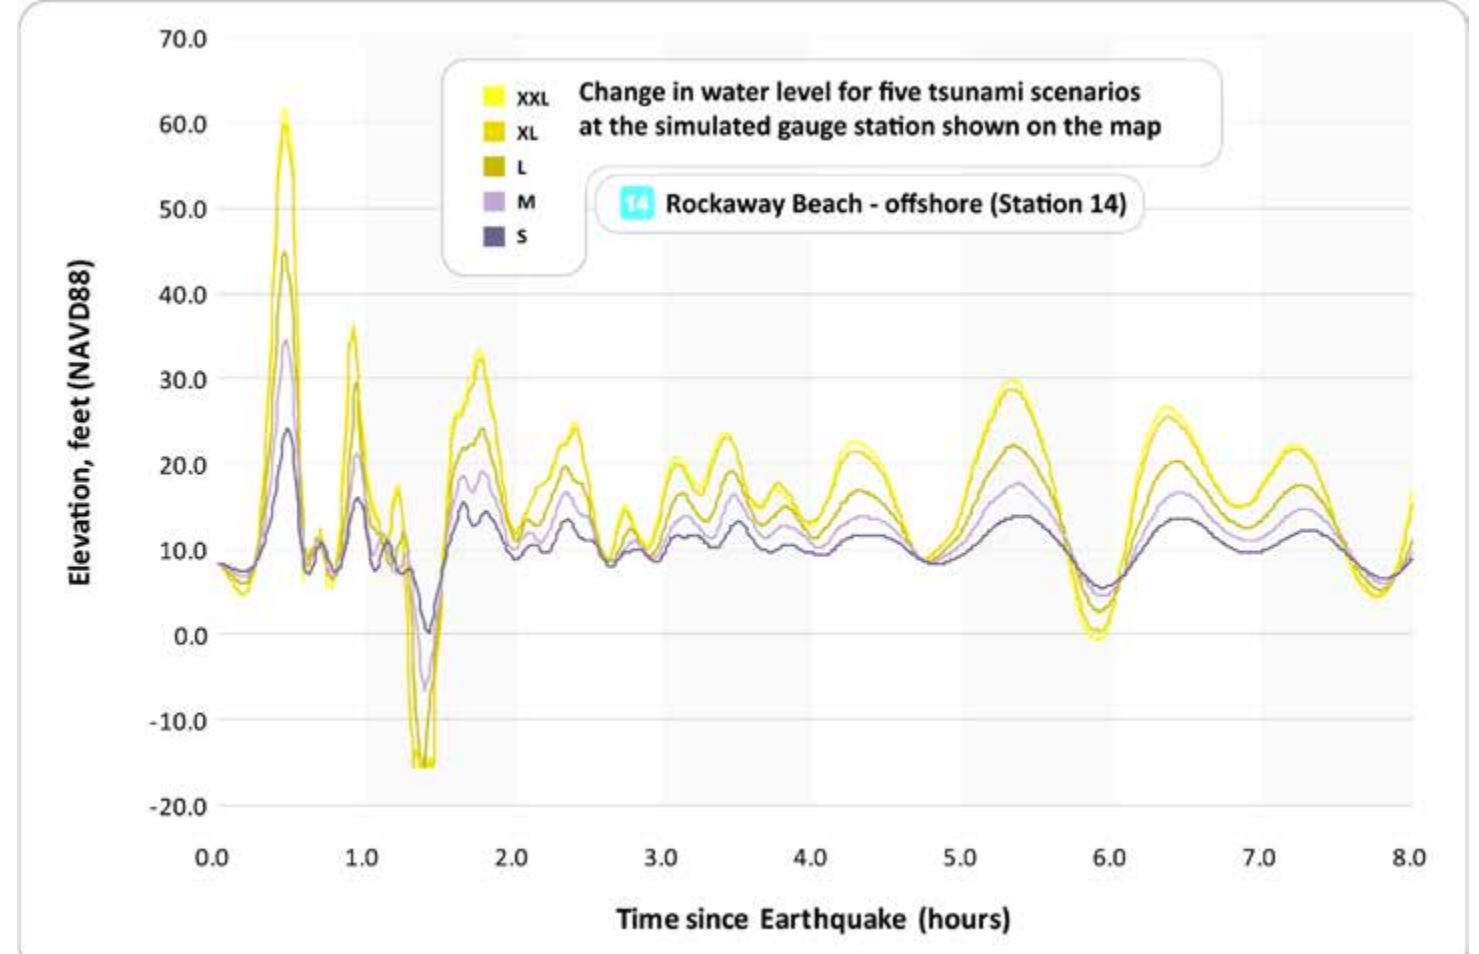


Figure 5: This chart depicts the tsunami waves as they arrive at the selected reference point (simulated gauge station). It shows the change in wave heights for all five tsunami scenarios over an 8-hour period. The starting water elevation (0.0 hour) takes into account the local land subsidence or uplift caused by the earthquake. Wave heights vary through time, and the first wave will not necessarily be the largest as waves interfere and reflect off local topography and bathymetry. (Chart revised 07/12/2012.)

Maximum Wave Elevation Profiles


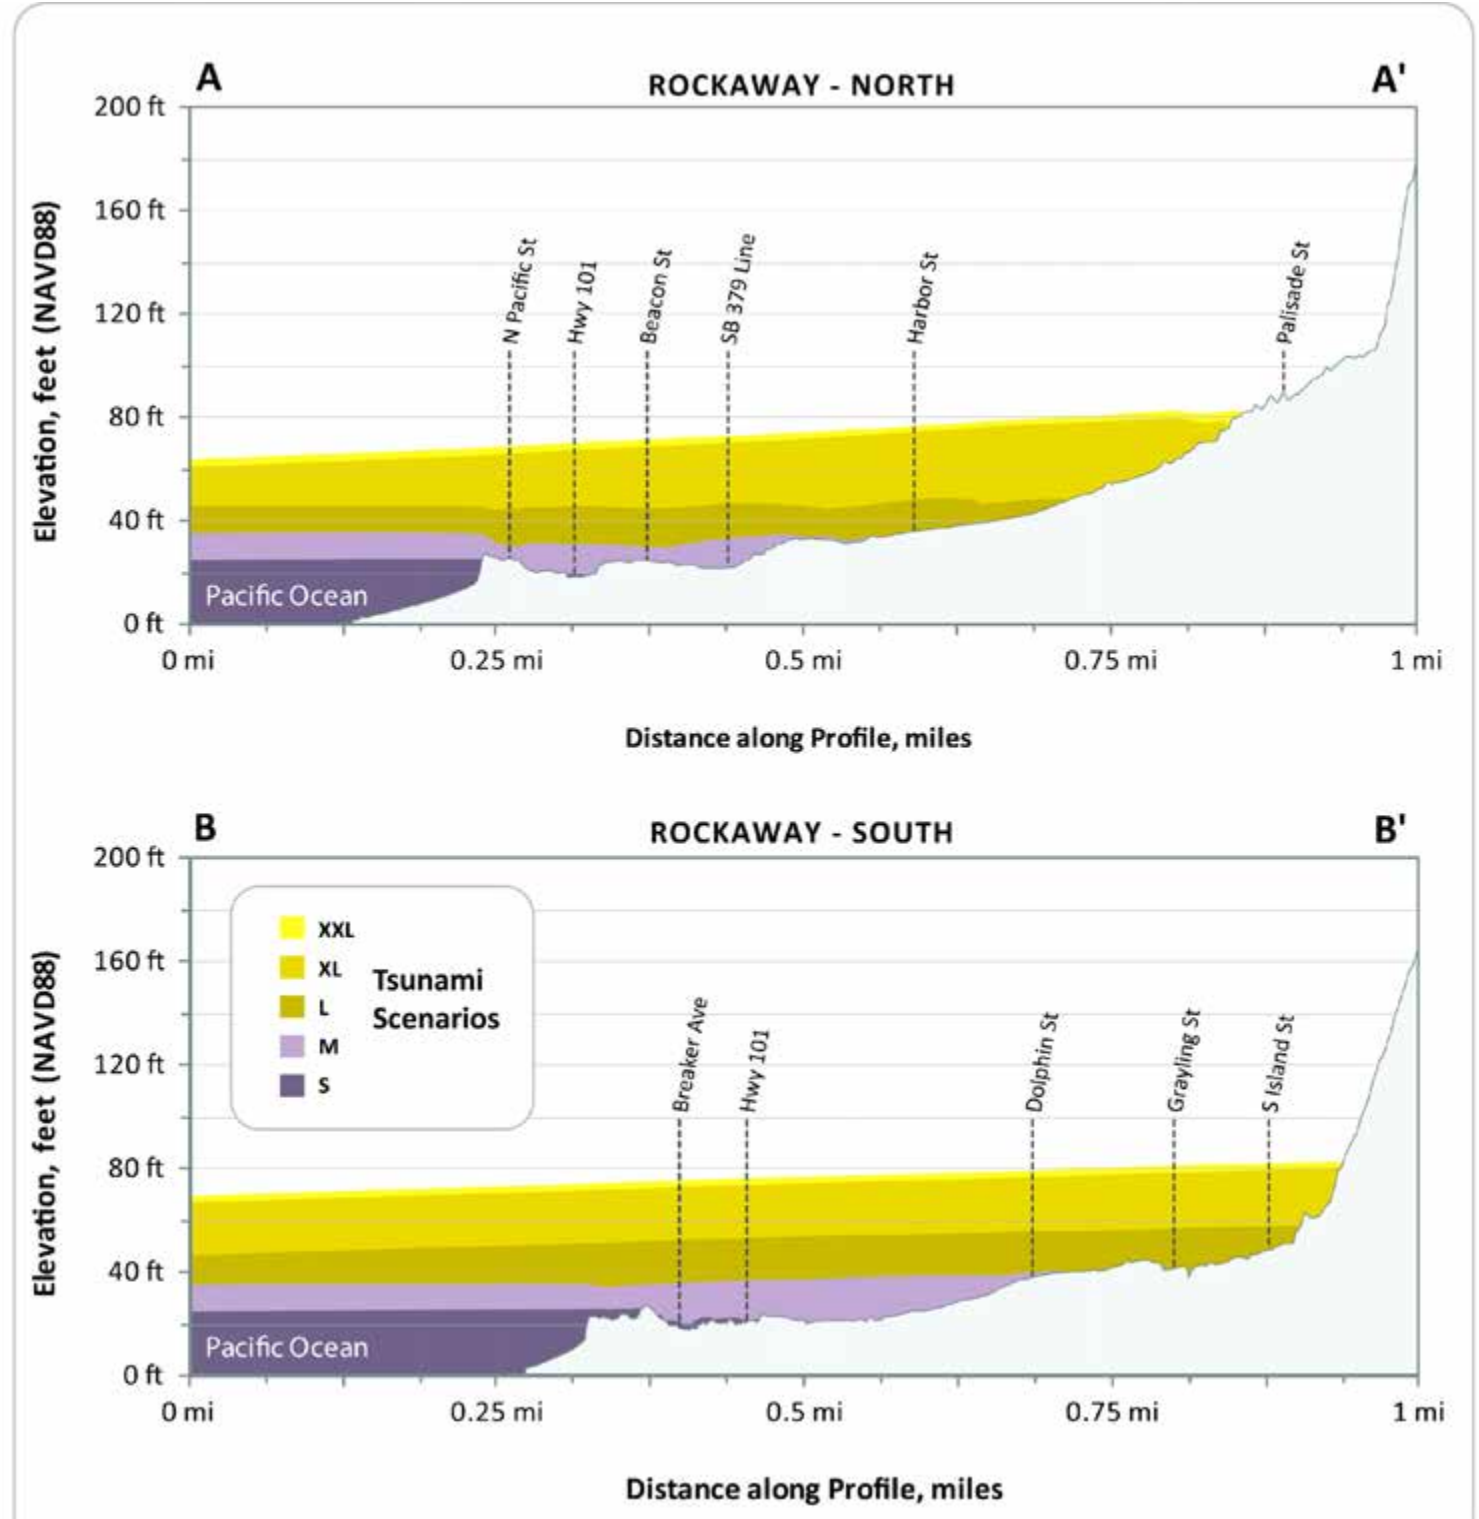


Figure 6: These profiles depict the expected maximum tsunami wave elevation for the five "T-shirt size" scenarios along lines A-A' and B-B'. The tsunami scenarios are modeled to occur at high tide and to account for local subsidence or uplift of the ground surface.

Local Source (Cascadia Subduction Zone) Tsunami Inundation Map Rockaway Beach, Oregon


2012

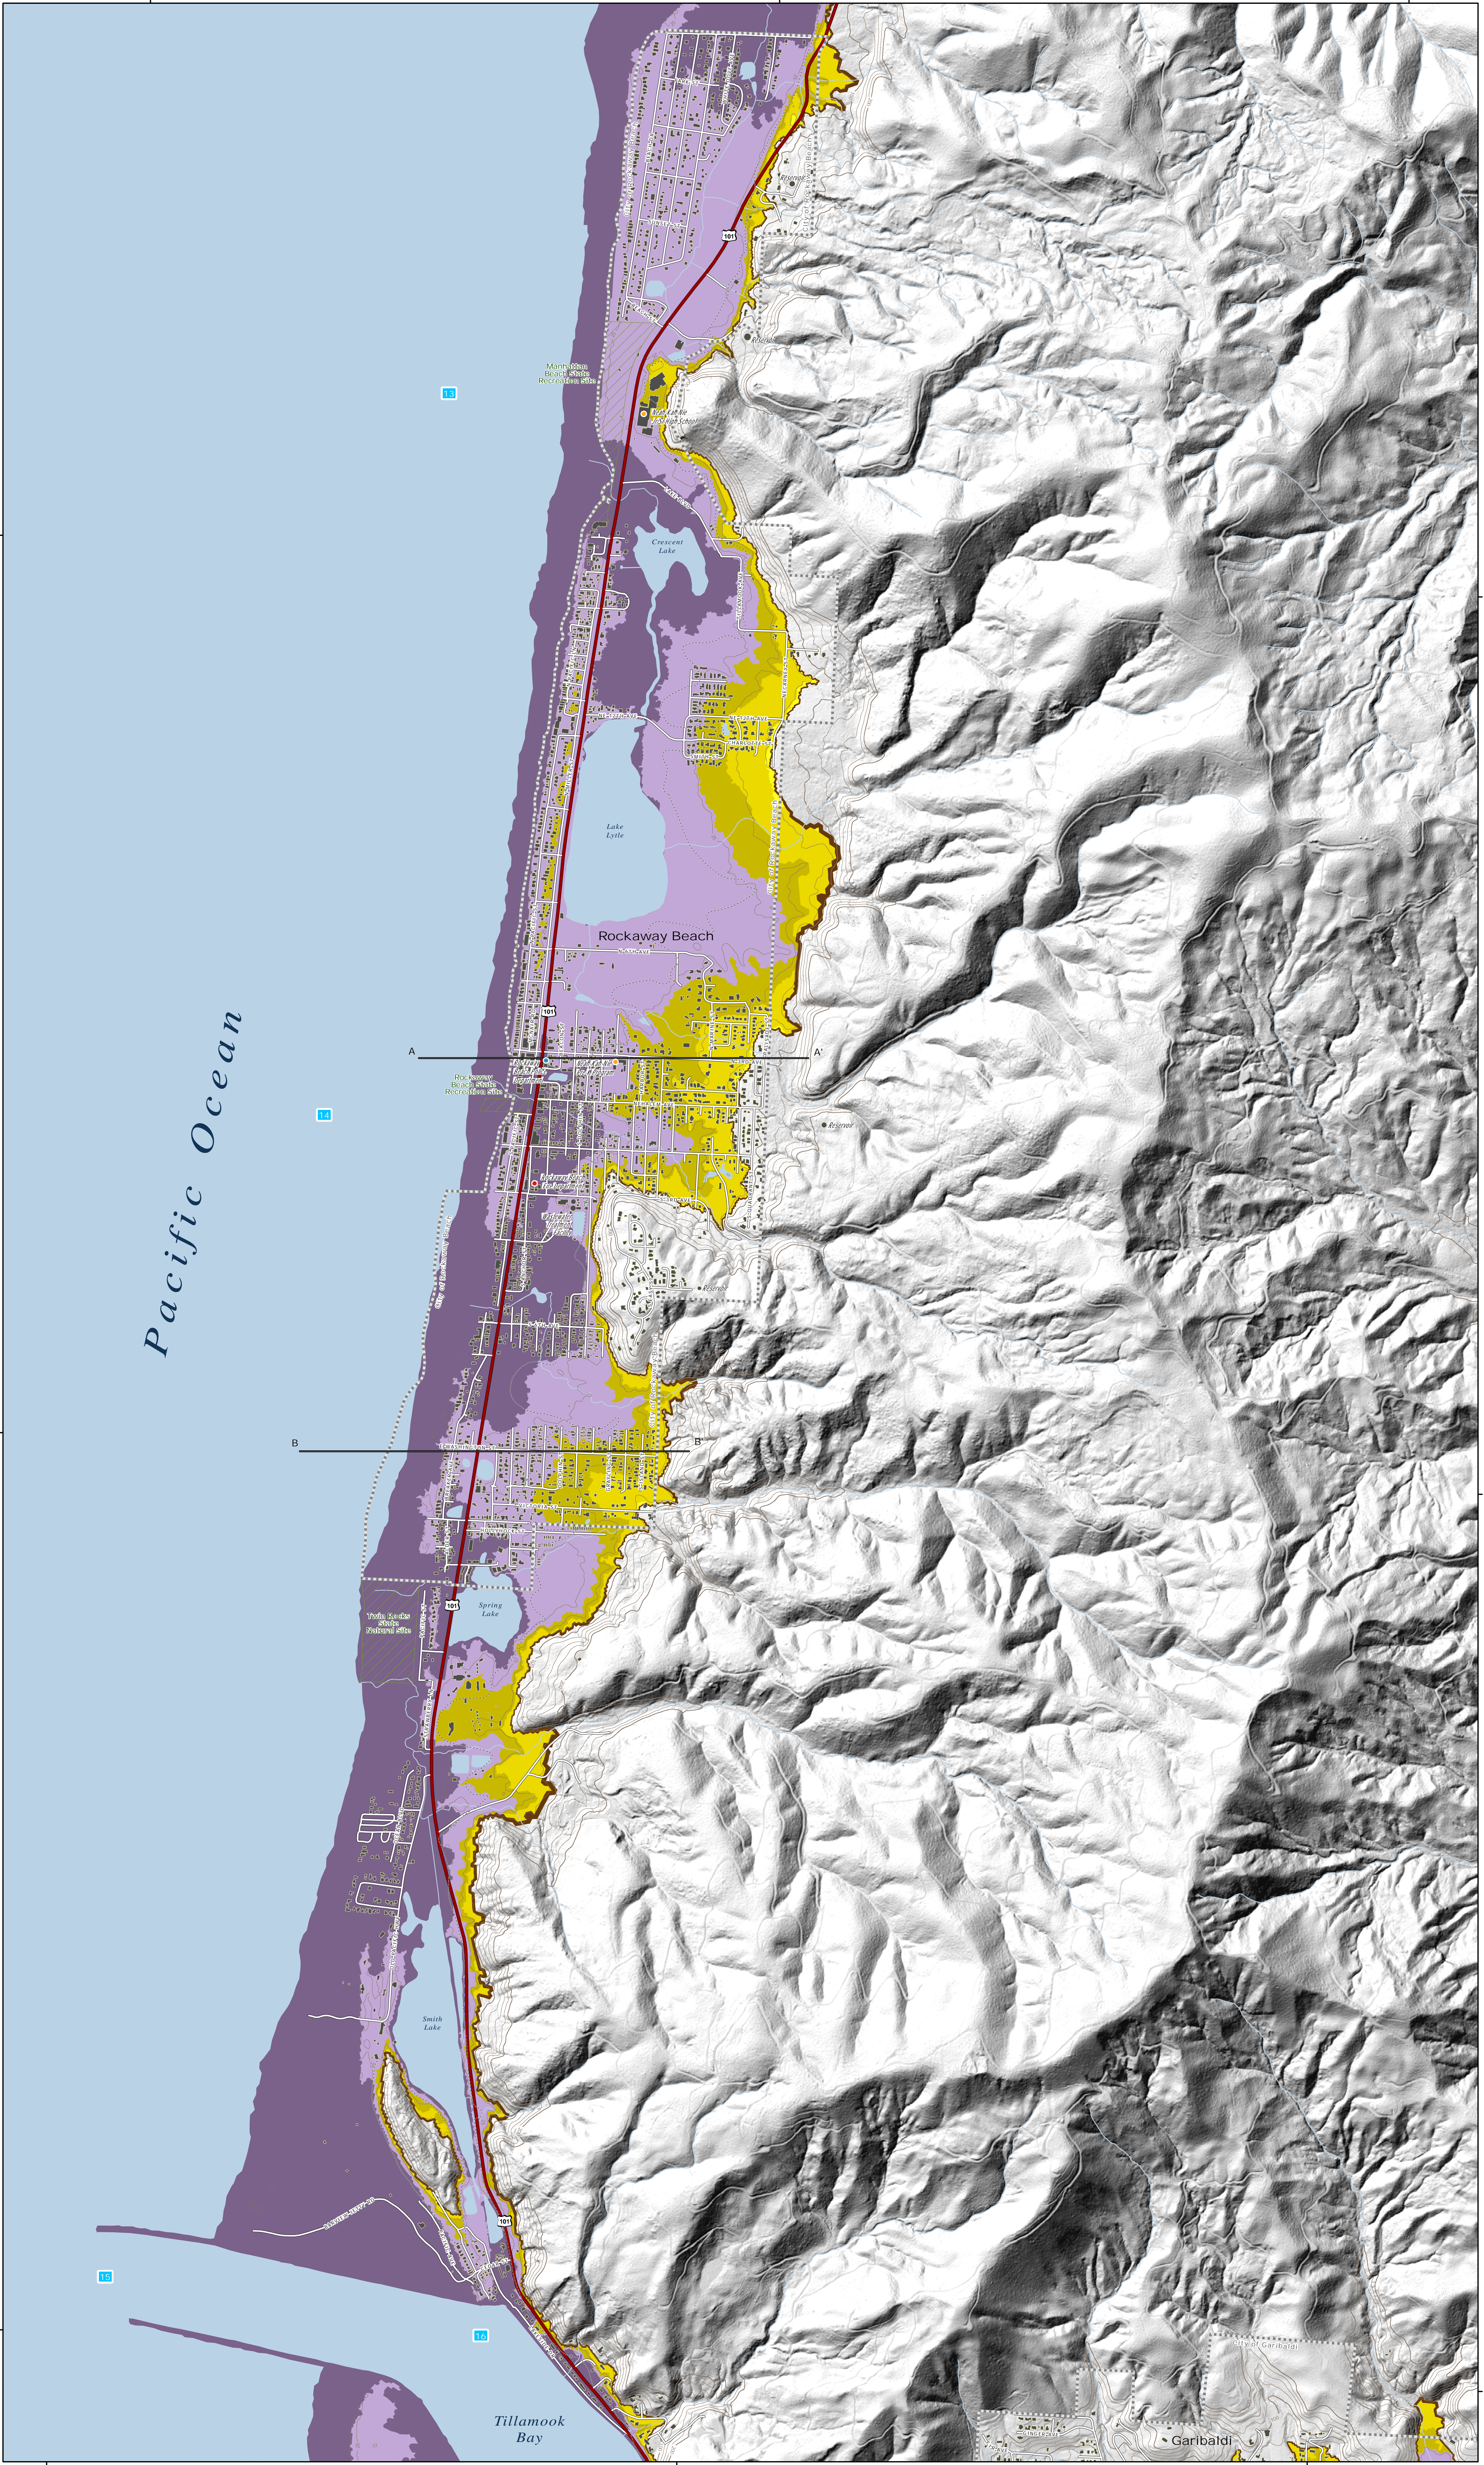

Legend

Earthquake Size	Average Slip Range (ft)	Maximum Slip Range (ft)	Time to Accumulate Slip (yrs)	Earthquake Magnitude
XXL	59 to 72	118 to 144	1,200	-9.1
XL	56 to 72	115 to 144	1,050 to 1,200	-9.1
L	36 to 49	72 to 98	650 to 800	-9.0
M	23 to 30	46 to 62	425 to 525	-8.9
S	13 to 16	30 to 36	30 to 36	-8.7
XXL Wet/Dry Zone				
Urban Growth Boundary				
Building Footprint				
Simulated Gauge Station				
Profile Location				
Senate Bill 379 Line				
State Park				
Elevation Contour (25 ft Intervals up to 200 ft)				
Fire Station				
Police Station				
School				
Hospital/Urgent Care Clinic				
U.S. Highway				
State Highway				
Improved Road				

Tsunami Inundation Map Index

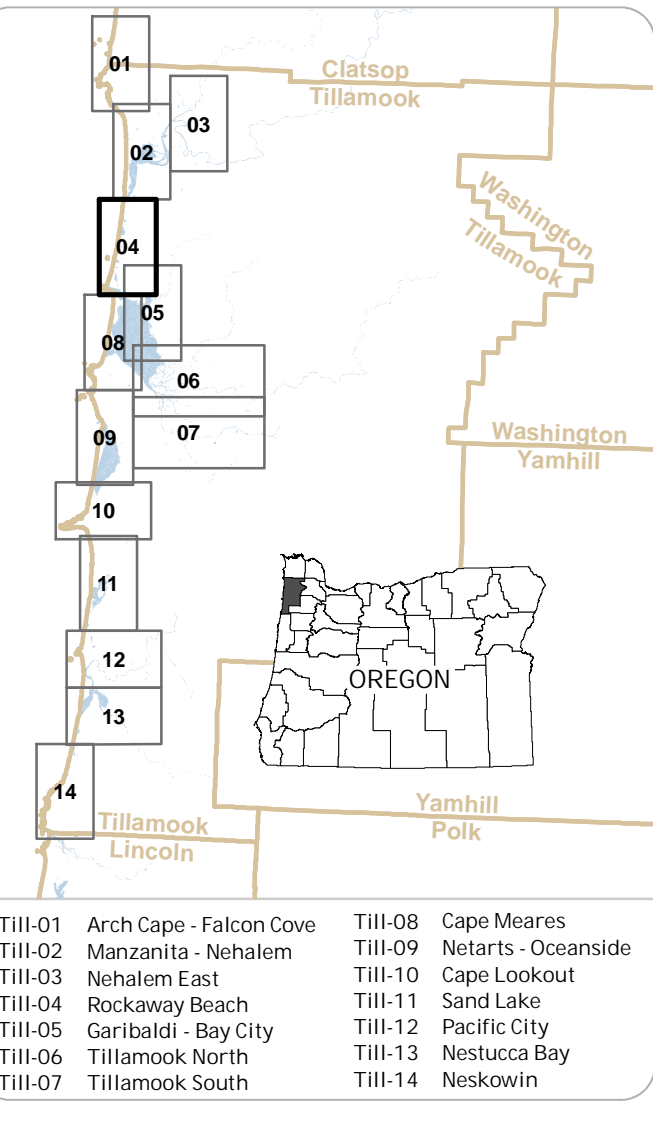

Data References

Source Data
This map is based on hydrodynamic tsunami modeling by Joseph Zhang, Oregon Health and Science University, Portland, Oregon. Model data input were created by John T. Engle and George B. Priest, Department of Geology and Mineral Industries (DOGAMI), Portland, Oregon.

Hydrology data, contours, critical facilities, and building footprints were created by DOGAMI. Senate Bill 379 line data were redigitized by Rachel R. Lyles Smith and Sean G. Pickner, DOGAMI, in 2011 (GIS file not in press, 2012).

Urban growth boundaries (2010) were provided by the Oregon Department of Land Conservation and Development (DLCD). Transportation data (2011) were provided by Tillamook County.

Lidar data are from DOGAMI Lidar Data Quaternary LIDAR 2011-07-12 68 Garibaldi, and LIDAR 2011-07-12 68 Nehalem.

Coordinate System: Oregon Statewide Lambert Conformal Conic, Unit: International Feet, Horizontal Datum: NAD 1983 NAD83, Vertical Datum: MVD 1988, Graticule: shown with geographic coordinates (latitude/longitude).

Scale: 1:10,000

References
2007 Working Group on California Earthquake Probabilities (WGCEP, 2008). The Uniform California Earthquake Rupture Forecast, Version 2 (UCERF 2). U.S. Geological Survey Open File Report 2007-1617 and California Geological Survey Special Report 203 [http://pubs.usgs.gov/of/2007/1617/].

Priest, G. B., 1995. Explanation of mapping methods and use of the tsunami hazard maps of the Oregon coast. Oregon Department of Geology and Mineral Industries Open File Report O-95-67, 95 p.

Priest, G. B., Goldfinger, C., Wang, K., Witter, R. C., Zhang, Y., and Baptista, A. M., 2009. Tsunami hazard assessment of the northern Oregon coast: a multi-disciplinary approach tested at Cannon Beach. Oregon Coastal Oregon Department of Geology and Mineral Industries Special Paper 41, 87 p.

Witter, R. C., Zhang, Y., Wang, K., Priest, G. B., Goldfinger, C., Stimpert, L. L., Engle, J. T., and Ferra, P. A., 2011. Simulating tsunami inundation at Cannon Beach, Oregon, using hypothetical Cascadia and Alaska earthquake scenarios. Oregon Department of Geology and Mineral Industries Special Paper 43, 57 p.

Software Esri ArcGIS 10.0, Microsoft® Excel®, and Adobe® Illustrator®

Funding: This map was funded under award #NA07NW547014 by the National Oceanic and Atmospheric Administration (NOAA) through the National Tsunami Hazard Mitigation Program.

Map Data Creation/Development: DoGAMI (Bathymetry Sources: George B. Priest, Laura L. Stimpert, Daniel L. Cox, Paul A. Ferra, Sean G. Pickner, Rachel R. Lyles Smith, Jennifer Ann Kadena, L. B. Hughes, Sean G. Pickner)

Map Production: Cartography: Kadena L.B. Hughes, Sean G. Pickner, Taylor L. Wampler
Cartography: Kadena L.B. Hughes, Sean G. Pickner, Taylor L. Wampler
Graphic Design: Deborah A. Schaeffer
Map Date: 07/12/2012

