


Distant Source (Alaska-Aleutian Subduction Zone) Tsunami Inundation Map Tillamook South, Oregon

2012

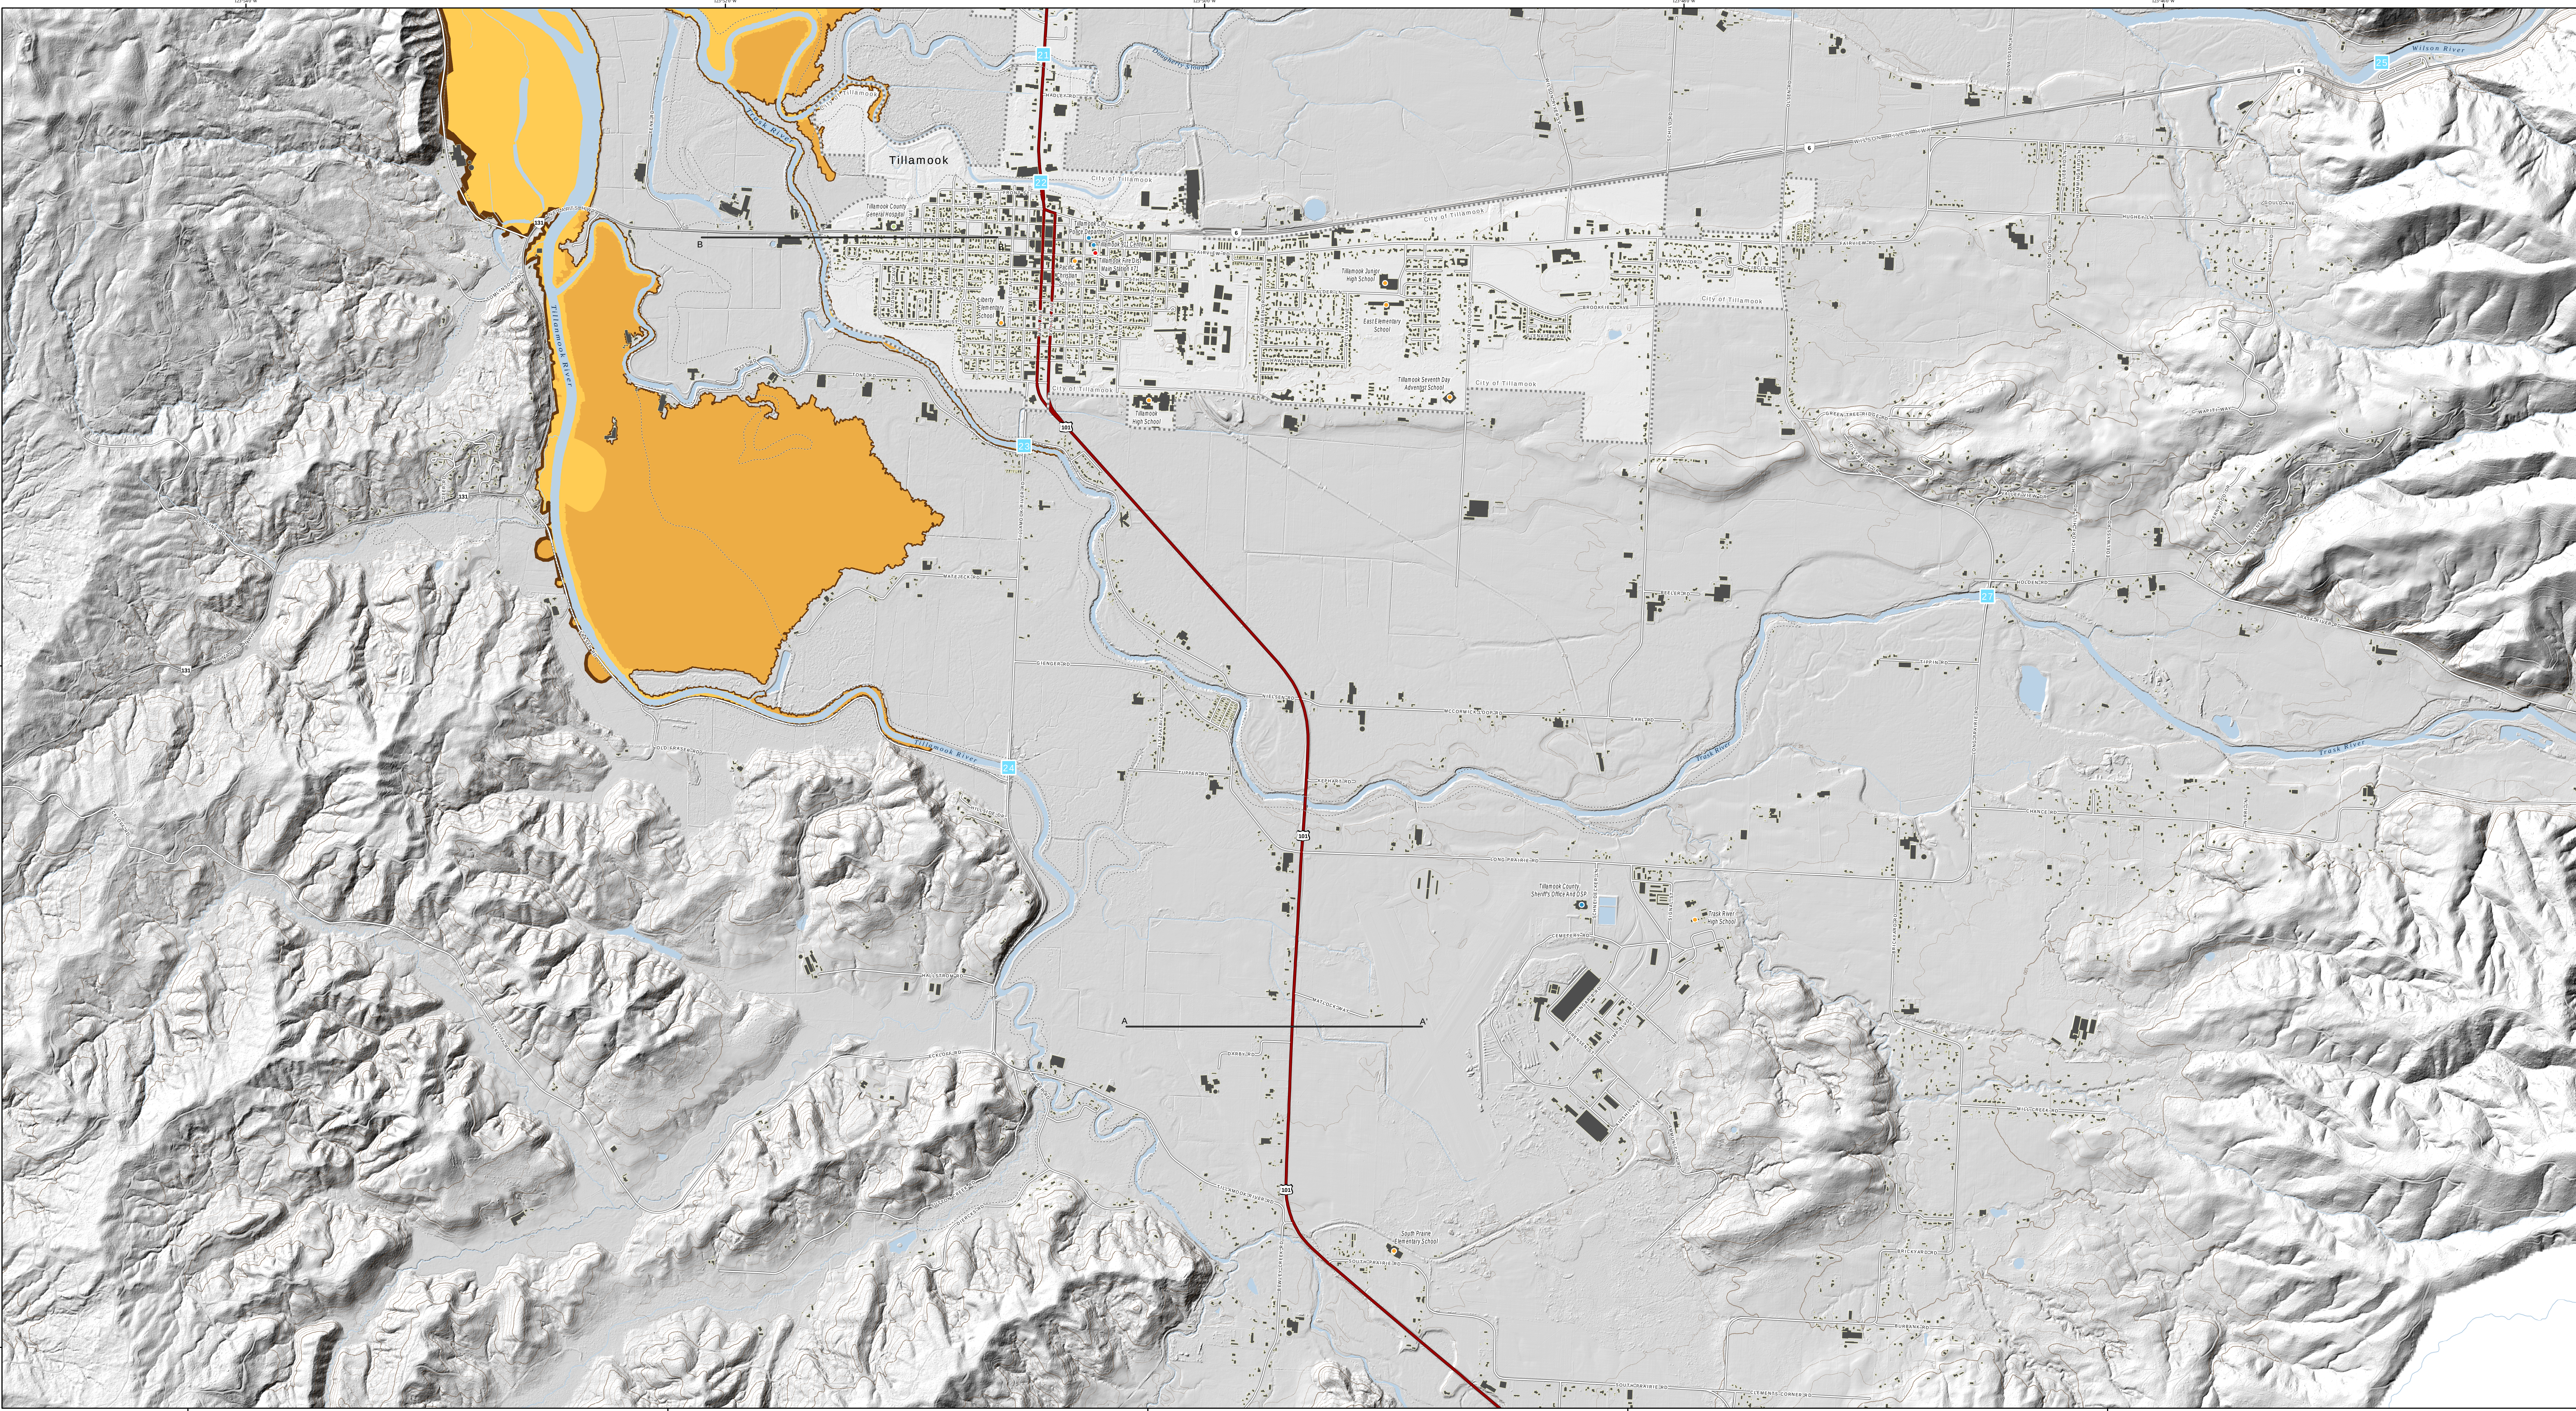

Introduction

The Oregon Department of Geology and Mineral Industries (DOGAMI) has been identifying and mapping the tsunami inundation hazard along the Oregon coast since 1994. In Oregon, DOGAMI manages the National Tsunami Hazard Mitigation Program, which has been administered by the National Oceanic and Atmospheric Administration (NOAA) since 1995. DOGAMI's work is designed to help cities, counties, and other sites in coastal areas reduce the potential for disastrous tsunami-related consequences by understanding and mitigating this geologic hazard. Using federal funding awarded by NOAA, DOGAMI has developed a new generation of tsunami inundation maps to help residents and visitors along the entire Oregon coast prepare for the next Cascadia Subduction Zone (CSZ) earthquake and tsunami, as well as for far-travelled or "distant" tsunamis.

The "Ring of Fire" also called the Circum-Pacific belt, is the zone of earthquake activity surrounding the Pacific Ocean. It is an arc stretching from New Zealand along the eastern edge of Asia, north across the Aleutian Islands of Alaska, and south along the coast of North and South America (Figure 1). The Ring of Fire is located at the borders of the Pacific Plate and other major tectonic plates. The Pacific Plate is colliding with and sliding underneath other plates creating subduction zones that eventually release energy in the form of an earthquake rupture. This rupture causes a vertical displacement of water that creates a tsunami. When these events occur around the Ring of Fire and not directly off the Oregon coast, they take more time to travel the Pacific Ocean and arrive onshore (Figure 2). Distant earthquake/tsunami events have affected the Oregon coast, for example, offshoots of the 1964 and offshoots of the 1964 March 2011.

Historically, about 20 distant tsunamis have been documented by Oregon tide gauges since 1854. The most severe was generated by the 1964 M9.2 Prince William Sound earthquake in Alaska. Oregon was hit hard by the tsunami, which killed four people and caused an estimated 750,000 to 1 million dollars in damage to bridges, houses, cars, boats, and sea walls. The greatest tsunami damage in Oregon did not occur along the ocean front as one might expect, but in the estuary channels located further inland. Of the communities affected, Seaside was inundated by a 10-foot tsunami wave and was the hardest hit. Tsunami wave heights reached 10 to 11.5 feet in the Nehalem River, 10 to 11.5 feet at Depoe Bay, 11.5 feet at Newport, 10 to 11 feet at Cannon Beach, 11 feet at Redford, 11 feet at Brookings, and 14 feet at Coos Bay (Witter and others, 2011).

Alaska-Aleutian Model Specifications: DOGAMI modeled two distant earthquake and tsunami scenarios involving M9.2 earthquakes originating near the Gulf of Alaska. The first scenario attempts to replicate the 1964 Prince William Sound event, and the second scenario represents a hypothetical maximum event. This maximum event is the same model used by the U.S. Geological Survey (USGS) in their 2000 tsunami hazard assessment of Seaside (TPSW, 2006). This model uses extreme fault model parameters that result in maximum seafloor uplift nearly twice as large as in the 1964 earthquake. The selected source location on the Aleutian chain of islands also shows higher energy directed towards the Oregon coast than other Alaskan source locations. For these reasons the "hypothetical Alaska Maximum" scenario is selected as the worst case distant tsunami scenario for Oregon. For more detailed information on the tsunami models and methodologies used, please see DOGAMI Publication Special Paper 43 (Witter and others, 2011).

Map Explanation

This tsunami inundation map displays the output of computer models representing the two selected tsunami scenarios: Alaska M9.2 (1964) and the Alaska Maximum. All tsunami simulations were run assuming that pre-wave tide was static (no flow) and equal to Mean Higher High Water (MHHW) tide. MHHW is defined as the average height of the higher high tides observed over an 18-year period at the Garibaldi tide gauge. The map legend depicts the respective amounts of deformation and the earthquake magnitude for these two scenarios. Figure 3 shows the cumulative number of buildings inundated within the map area.

The computer simulation model output is provided to DOGAMI as millions of points with values that indicate whether the location of each point is wet or dry. These points are converted to wet and dry contour lines that form the extent of inundation. The transition area between the wet and dry contour lines is termed the Wet/Dry Zone, which equates to the amount of error in the model when determining the maximum inundation for the each scenario. Only the Alaska Maximum Wet/Dry Zone is shown on this map.

This map also shows the regulatory tsunami inundation line (Oregon Revised Statutes 455.446 and 455.447), commonly known as the Senate Bill 370 line. Senate Bill 370 (1985) instructed DOGAMI to establish the area of expected tsunami inundation based on scientific evidence and tsunami modeling in order to prohibit the construction of new essential and special occupancy structures in the tsunami inundation zone (Priet, 1995).

Time Series Graphs and Wave Elevation Profiles: In addition to the tsunami scenarios, the computer model produces time series data for "gauge" locations in the area. These points are simulated gauge stations that record the time, in seconds, of the tsunami wave arrival and the wave height observed. It is especially noteworthy that the greatest wave height and velocity observed are not necessarily associated with the first tsunami wave to arrive onshore. Therefore, evacuees should not assume that the tsunami event is over until the proper authorities have sounded the all-clear at the end of the evacuation. Figure 4 depicts the tsunami waves as they arrive at a simulated gauge station. Figure 5 depicts the overall wave height and inundation extent for the two scenarios at the profile locations shown on this map.

Ring of Fire

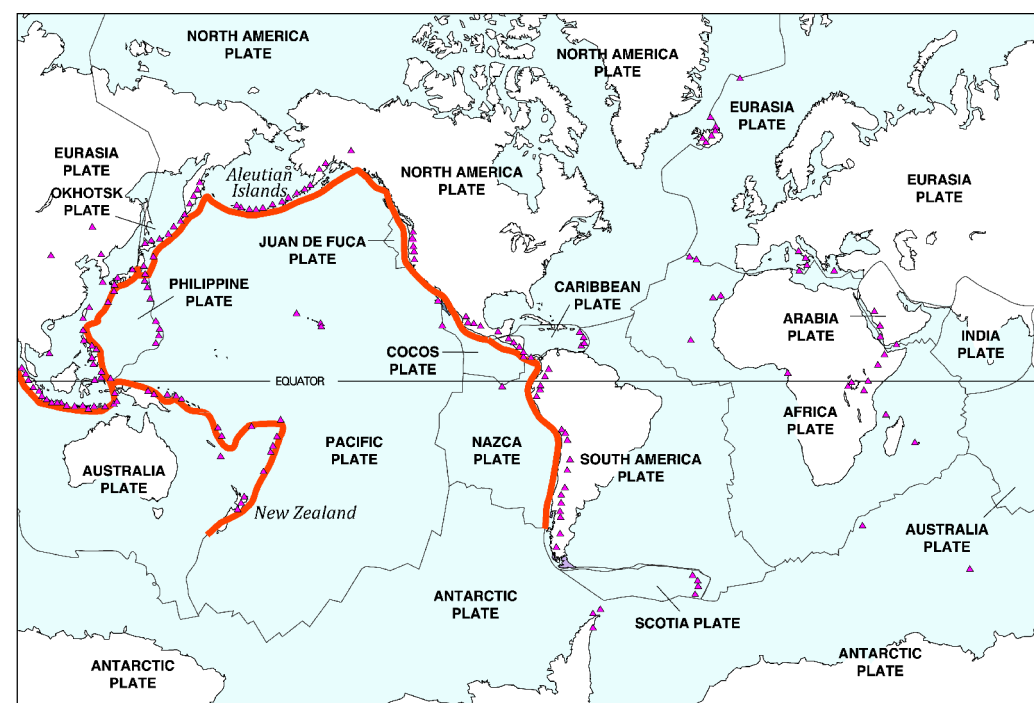


Figure 1: The "Ring of Fire" is a zone of active volcanoes and volcanoes that ring much of the Pacific Ocean, including the Oregon coast. Volcanoes and earthquakes along this ring are caused by the movement of tectonic plates. One type of movement is called subduction—when one tectonic plate, such as those that compose the rock beneath the Pacific Ocean, sinks beneath thicker, lighter plates that make continental plates. Earthquakes that occur as a result of subduction can trigger tsunamis.

Prince William Sound 1964 M9.2 Earthquake and Tsunami Travel Time Map

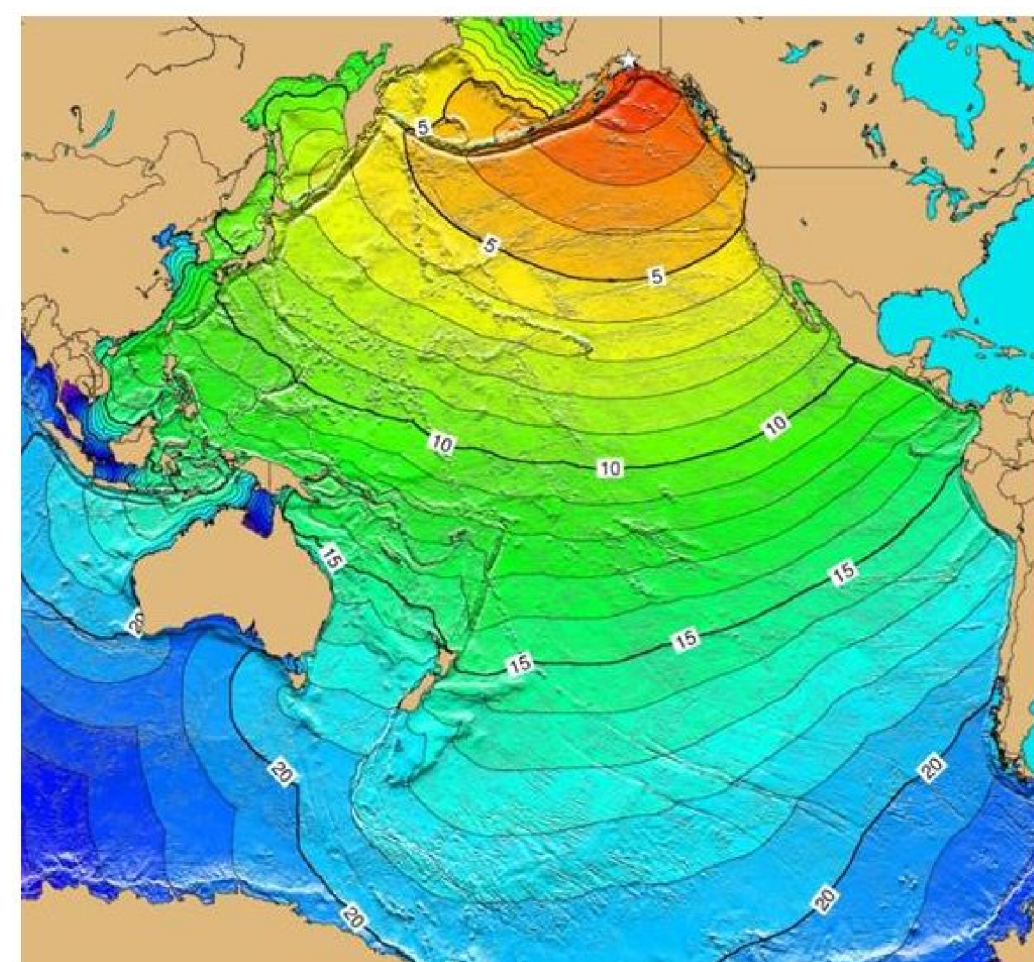


Figure 2: This image depicts the initial initial tsunami arrival times, in hours, around the Pacific Rim from the 1964 Prince William Sound earthquake. This magnitude 9.2 earthquake and resulting tsunami caused 125 deaths and \$2.1 billion in property loss \$84 million and 350 deaths in Alaska. (NOAA/NOCS). The tsunami devastated many towns along the Gulf of Alaska, left serious damage in British Columbia, Hawaii, and along the west coast of the United States, and was recorded on tide gauges in Cuba and Puerto Rico.

Buildings within Tsunami Inundation Zones



Figure 3: The table and chart show the number of buildings inundated for the Alaska M9.2 (1964) and the Alaska Maximum tsunami scenarios for cities and unincorporated portions of the map.

Estimated Tsunami Wave Height through Time for Simulated Gauge Station

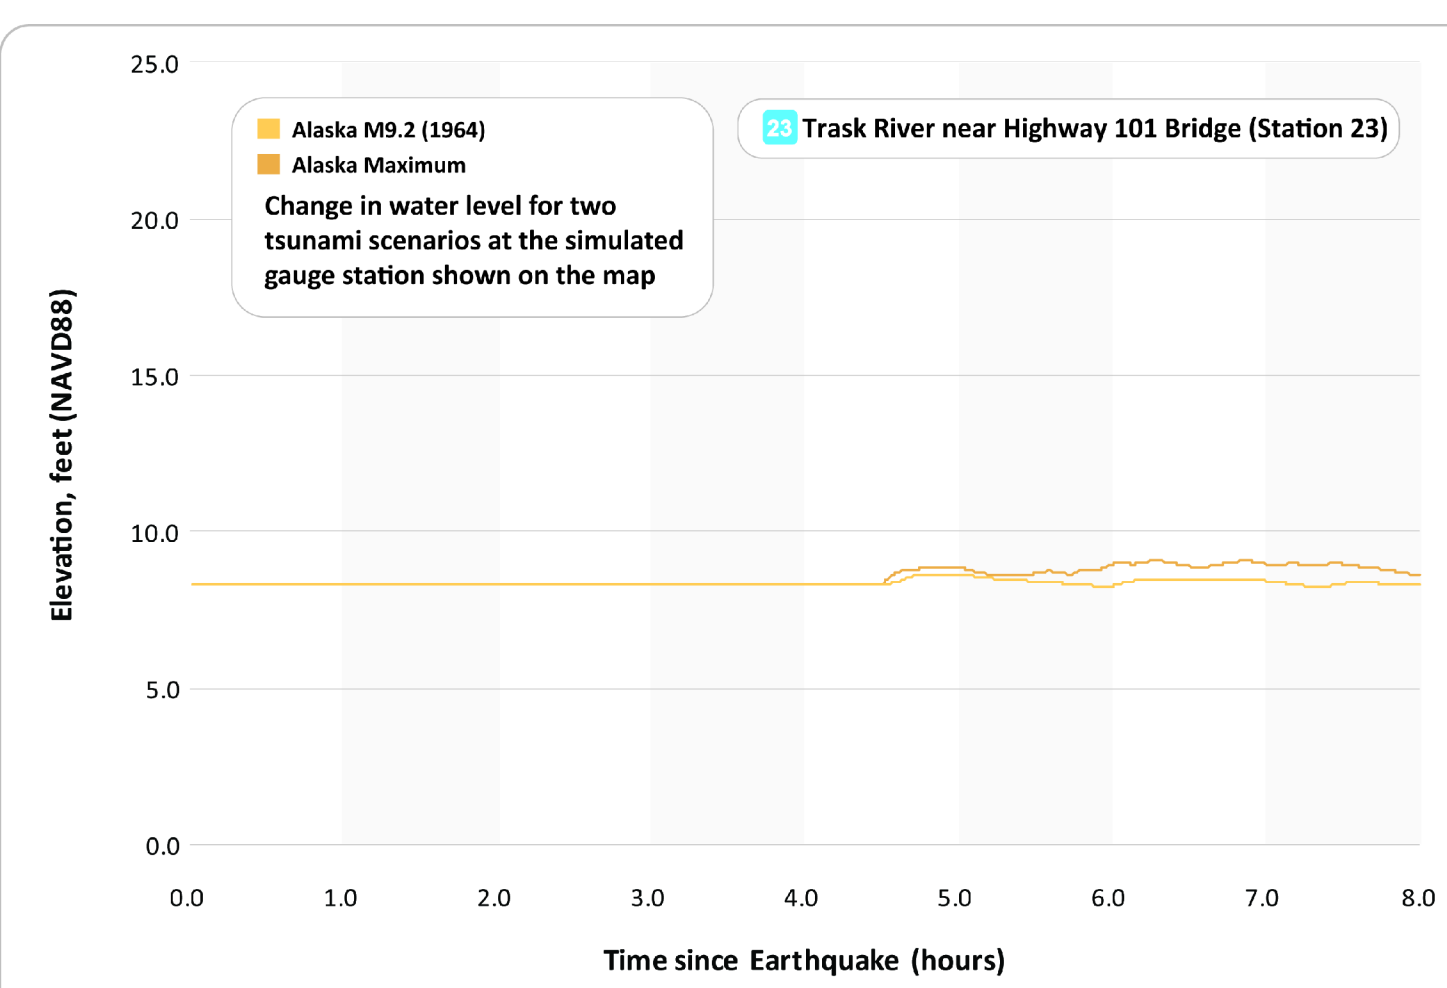


Figure 4: This chart depicts the tsunami waves as they arrive at the selected reference point (simulated gauge station). It shows the change in wave heights for the two Alaska tsunami scenarios over an 8-hour period. Wave heights vary through time, and the first wave will not necessarily be the largest as waves interfere and reflect off local topography and bathymetry. (Chart revised 07/12/2012)

Maximum Wave Elevation Profiles


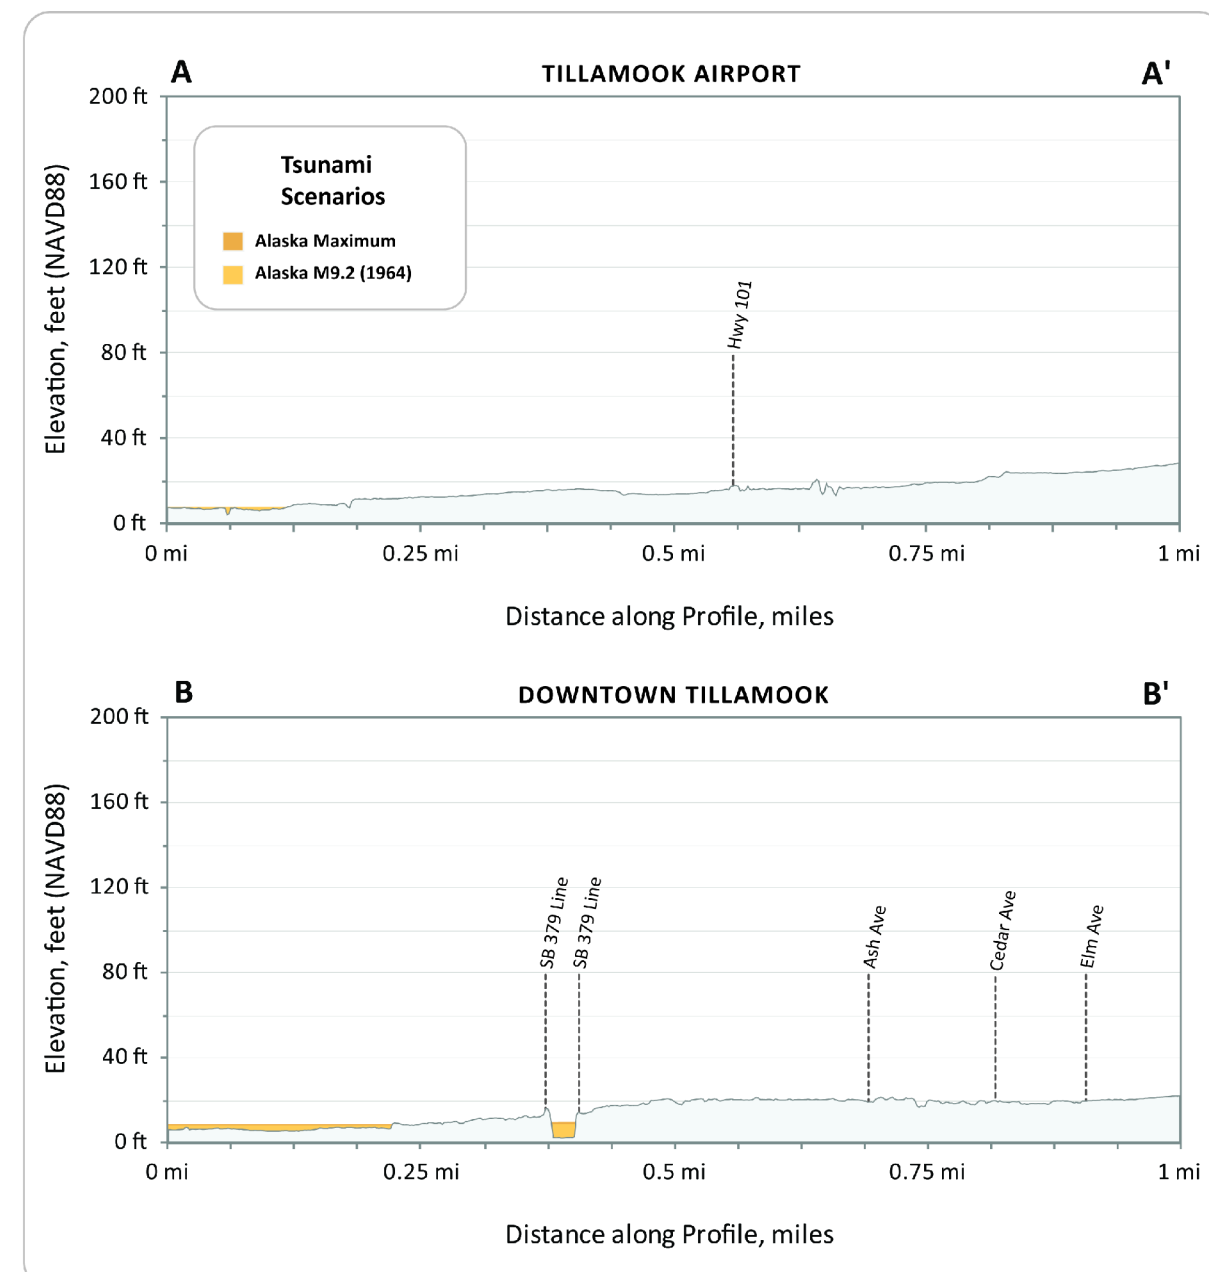


Figure 5: These profiles depict the expected maximum tsunami wave elevation for the two Alaska tsunami scenarios along lines A-A' and B-B'. The tsunami scenarios are modeled to occur at a static (no flow) tide and equal to the Mean Higher High Water (MHHW) high tide.

Legend

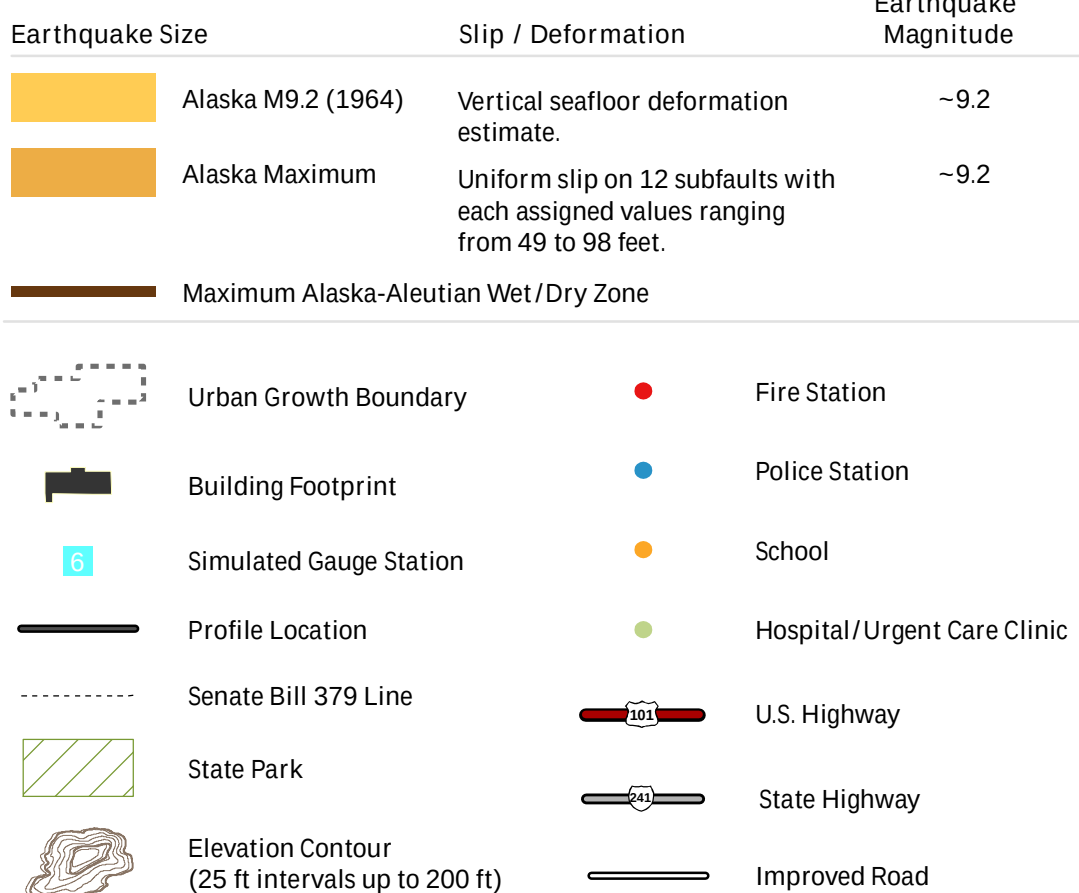

Data References

Source data:
This map is based on hydrodynamic tsunami modeling by Joseph Zhang, Oregon Health and Science University, Portland, Oregon. Model data sets were created by John C. Engel and George W. Hwang, Department of Geology and Mineral Industries (DOGAMI), Portland, Oregon.
Hydrology data, contours, critical tide line, and building footprints were created by DOGAMI. Senate Bill 370 line data were redigitized by Rachel R. Lytle Smith and Ian P. Madin, DOGAMI, in 2011. USGS 10m, 15m, 30m, 60m, and 120m Digital Elevation Models (DEM) were provided by the Oregon Department of Land Conservation and Development (DLCD).
Topographic data (2008) were provided by Data Users were added to DOGAMI to improve the spatial accuracy of the bathymetry or to add newly constructed features present in the original data layer.
Lidar data are from DOGAMI. Lidar Data Queried from DOGAMI 10m, 15m, 30m, 60m, and 120m DEMs. The data were added to DOGAMI to improve the spatial accuracy of the bathymetry or to add newly constructed features present in the original data layer.
Coordinate System: Oregon Statewide Lambert Conformal Conic, with international datum: North American Datum 1983 (NAD 83). Vertical datum: NAVD 1983. Contour lines with topographic coordinates: (NAD83 long/lat).

References:
National Oceanic and Atmospheric Administration (NOAA). 2000. Coastal Historical Tsunami Database. Boulder, CO, USA. (<http://www.ngs.noaa.gov/HSTDB/>)
Priet, R. L., 1995. Evaluation of engineering methods and use of the tsunami hazard maps of the Oregon coast. Oregon Department of Geology and Mineral Industries. Open File Report O-95-07, 55 p.
Priet, R. L., 2006. Evaluation of engineering methods and use of the tsunami hazard maps of the Oregon coast. Oregon Department of Geology and Mineral Industries. Open File Report O-06-07, 55 p.
Witter, R.C., Zhang, Y., Wang, Y., Priest, R.L., Goldfinger, C., Simons, L.J., English, T., and Ferro, F.A., 2011. Simulating tsunami inundation of Seaside and Alaska coast require awareness: Oregon Department of Geology and Mineral Industries Special Paper 43, 57 p.

Software: Esri ArcGIS 10.0, Microsoft Excel, and Adobe Illustrator

Funding: This map was funded under award #H010045607010 by the National Oceanic and Atmospheric Administration (NOAA) through the National Tsunami Hazard Mitigation Program.

Map Data Creation/Development:
Tsunami Hazard Scenario: George W. Hwang, John C. Engel, and Ian P. Madin, DOGAMI
Map Data: Rachel R. Lytle Smith, Ian P. Madin, DOGAMI
Base Map Data: National Aerial Photography, Esri, Inc.

Map Production:
Cartography: Rachel R. Lytle Smith, Ian P. Madin, DOGAMI
Text: Don W.T. Lewis, Rachel R. Lytle Smith
Editing: Don W.T. Lewis, Rachel R. Lytle Smith
Publication: Deborah A. Schaefer
Map Date: 07/12/2012

Tsunami Inundation Map Index

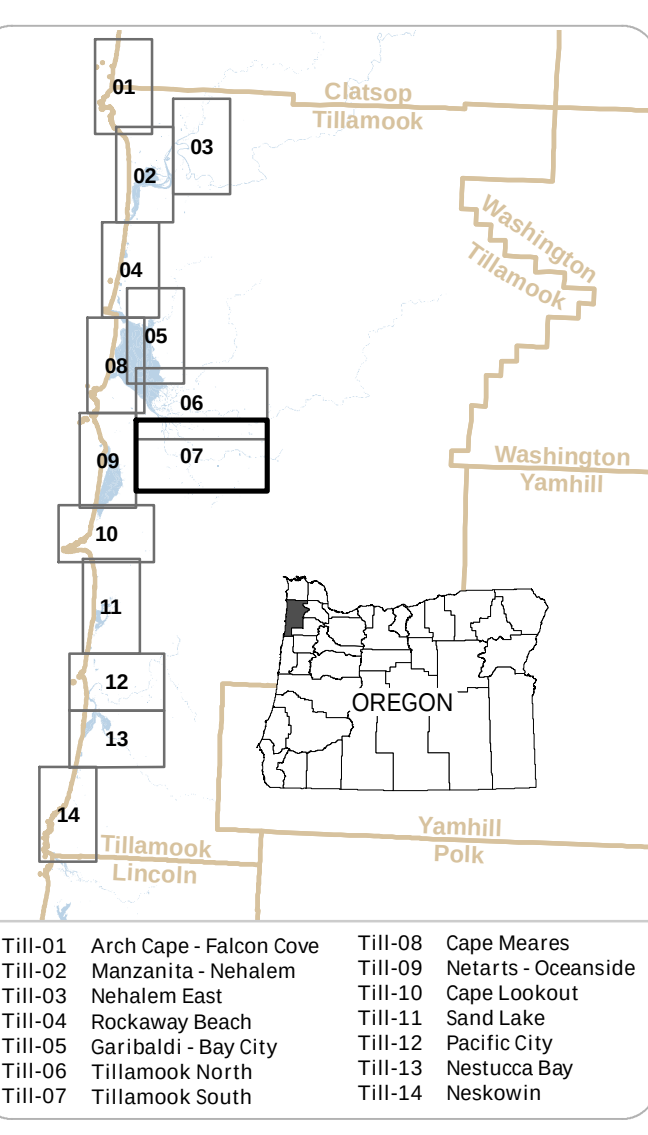


Figure 6: This map shows the location of the Tillamook South map (Till-07) within the larger context of the Oregon coast. The index map shows the entire Oregon coast with various map sheets labeled. The Tillamook South map is highlighted in orange. A scale bar indicates 0 to 1 kilometer.