Arcadia Beach St Recreation Sit

Arcadia Beach State Recreation Si

Cannon Beach

Plate 1

Introduction

The Oregon Department of Geology and Mineral Industries (DOGAMI) has been identifying and mapping the tsunami inundation hazard along the Oregon coast since 1994. In Oregon, DOGAMI manages the National Tsunami Hazard Mitigation Program, which has been administered by the National Oceanic and Atmospheric Administration (NOAA) since 1995. DOGAMI's work is designed to help cities, counties, and other sites in coastal areas reduce the potential for disastrous tsunami-related consequences by understanding and mitigating this geologic hazard. Using federal funding awarded by NOAA, DOGAMI has developed a new generation of tsunami inundation maps to help residents and visitors along the entire Oregon coast prepare for the next Cascadia Subduction Zone (CSZ) earthquake and tsunami.

The CSZ is the tectonic plate boundary between the North American Plate and the Juan de Fuca Plate (Figure 1). These plates are converging at a rate of about 1.5 inches per year, but the movement is not smooth and continuous. Rather, the plates lock in place, and unreleased energy builds over time. At intervals, this accumulated energy is violently released in the form of a megathrust earthquake rupture, where the North American Plate suddenly slips westward over the Juan de Fuca Plate. This rupture causes a vertical displacement of water that creates a tsunami (Figure 2). Similar rupture processes and tsunamis have occurred elsewhere on the planet where subduction zones exist: for example, offshore Chile in 1960 and 2010, offshore Alaska in 1964, near Sumatra in 2004, and offshore Japan in March 2011.

CSZ Frequency. Comprehensive research of the offshore geologic record indicates that at least 19 major ruptures of the full length of the CSZ have occurred off the Oregon coast over the past 10,000 years (Figure 3). All 19 of these full-rupture CSZ events were likely magnitude 8.9 to 9.2 earthquakes (Witter and others, 2011). The most recent CSZ event happened approximately 300 years ago on January 26, 1700. Sand deposits carried onshore and left by the 1700 event have been found 1.2 miles inland; older tsunami sand deposits have also been discovered in estuaries 6 miles inland. As shown in Figure 3, the range in time between these 19 events varies from 110 to 1,150 years, with a median time interval of 490 years. In 2008 the United States Geological Survey (USGS) released the results of a study announcing that the probability of a magnitude 8-9 CSZ earthquake occurring over the next 30 years is 10% and that such earthquakes occur about every 500 years (WGCEP,

CSZ Model Specifications: The sizes of the earthquake and its resultant tsunami are primarily driven by the amount and geometry of the slip that takes place when the North American Plate snaps westward over the Juan de Fuca Plate during a CSZ event. DOGAMI has modeled a wide range of earthquake and tsunami sizes that take into account different fault geometries that could amplify the amount of seawater displacement and increase tsunami inundation. Seismic geophysical profiles show that there may be a steep splay fault running nearly parallel to the CSZ but closer to the Oregon coastline (Figure 1). The effect of this splay fault moving during a full-rupture CSZ event would be an increase in the amount of vertical displacement of the Pacific Ocean, resulting in an increase of the tsunami inundation onshore in

Oregon. DOGAMI has also incorporated physical evidence that suggests that portions of the coast may drop 4 to 10 feet during the earthquake; this effect is known as subsidence. Detailed information on fault geometries, subsidence, computer models, and the methodology used to create the tsunami scenarios presented on this map can be found in DOGAMI Special Papers 41 (Priest and others, 2009) and 43 (Witter and


This tsunami inundation map displays the output of computer models representing five selected tsunami scenarios, all of which include the earthquake-produced subsidence and the tsunami-amplifying effects of the splay fault. Each scenario assumes that a tsunami occurs at Mean Higher High Water (MHHW) tide; MHHW is defined as the average height of the higher high tides observed over an 18-year period at the Astoria tide gauge (NOAA Station 9439040). To make it easier to understand this scientific material and to enhance the educational aspects of hazard mitigation and response, the five scenarios are labeled as "T-shirt sizes" ranging from Small, Medium, Large, Extra Large, to Extra Extra Large (S, M, L, XL, XXL). The map legend depicts the respective amounts of slip, the frequency of occurrence, and the earthquake magnitude for these five scenarios. Figure 4 shows the cumulative number of buildings inundated within the map area.


The computer simulation model output is provided to DOGAMI as millions of points with values that indicate whether the location of each point is wet or dry. These points are converted to wet and dry contour lines that form the extent of inundation. The transition area between the wet and dry contour lines is termed the Wet/Dry Zone, which equates to the amount of error in the model when determining the maximum inundation for each scenario. Only the XXL Wet/Dry Zone is shown on


This map also shows the regulatory tsunami inundation line (Oregon Revised Statutes 455.446 and 455.447), commonly known as the Senate Bill 379 line. Senate Bill 379 (1995) instructed DOGAMI to establish the area of expected tsunami inundation based on scientific evidence and tsunami modeling in order to prohibit the construction of new essential and special occupancy structures in this tsunami inundation zone


Time Series Graphs and Wave Elevation Profiles. In addition to the tsunami scenarios, the computer model produces time series data for "gauge" locations in the area. These points are simulated gauge stations that record the time, in seconds, of the tsunami wave arrival and the wave height observed. It is especially noteworthy that the greatest wave height and velocity observed are not necessarily associated with the first tsunami wave to arrive onshore. Therefore evacuees should not assume that the tsunami event is over until the proper authorities have sounded the all-clear signal at the end of the evacuation. Figure 5 depicts the tsunami waves as they arrive at a simulated gauge station. Figure 6 scenarios at the profile locations shown on this map.

Cascadia Subduction Zone Setting

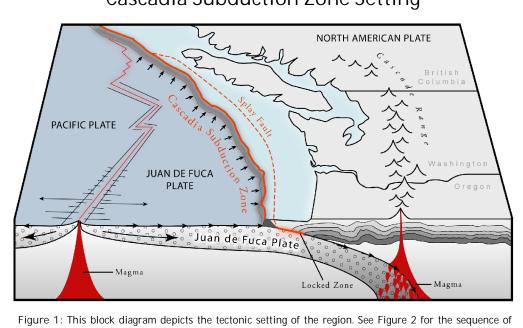

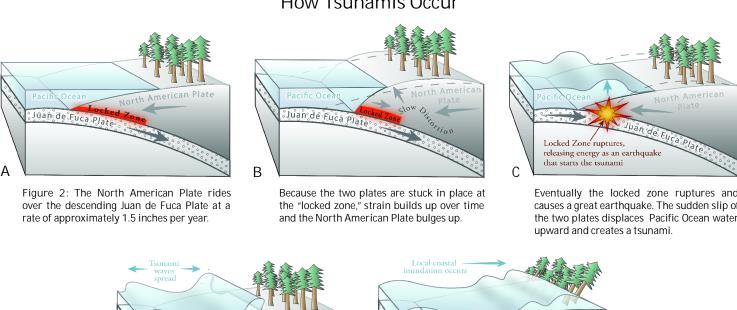



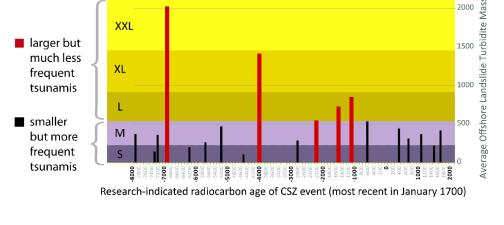

Buildings within Tsunami Inundation Zones

			Entire Map	City of	Unincorporated
			Area	Cannon Beach	Areas
otal Bu	ildings		896	415	481
uildings	within Tsu	nami Zones*	_		
		Small	110	42	68
		Medium	331	167	164
		Large	481	247	234
		Extra Large	694	333	361
		Extra Extra Large	719	344	375
ercent o	f Buildings	within Tsunami Zones	_		
		Small	12.3%	10.1%	14.1%
		Medium	36.9%	40.2%	34.1%
		Large	53.7%	59.5%	48.6%
		Extra Large	77.5%	80.2%	75.1%
		Extra Extra Large	80.2%	82.9%	78.0%
Building	counts sho	own are based on polygon ce			
	100%				
	90%				
	100% 90% 80%				
	100% 90% 80% 70%				
	100% 90% 80% 70% 60%				
	100% 90% 80% 70% 60% 50%				
	100% 90% 80% 70% 60% 50% 40%				
ing Percent of Buildings within Tsunami Zones	100% 90% 80% 70% 60% 50% 40% 30%				
	100% 90% 80% 70% 60% 50% 40% 30%	own are based on polygon ce		nulative within the m	nap area.

Estimated Tsunami Wave Height through Time for Simulated Gauge Station



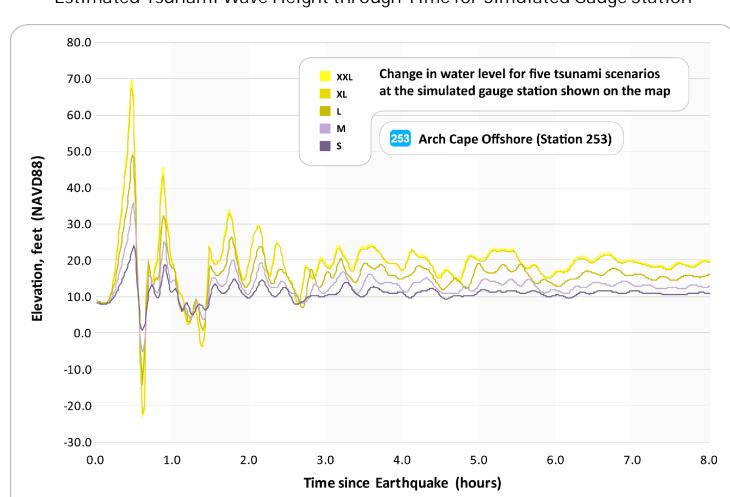



Figure 5: This chart depicts the tsunami waves as they arrive at the selected reference point (simulated gauge station). It shows the change in wave heights for all five tsunami scenarios over an 8-hour period. The starting water elevation (0.0 hour) takes into account the local land subsidence or uplift caused by the earthquake. Wave heights vary through time, and the first wave will not necessarily be the largest as waves interfere and reflect off local topography and bathymetry. Any absence of data indicates periods for which tsunami inundation has not yet reached or has receded from the station location and dry land is


Maximum Wave Elevation Profiles

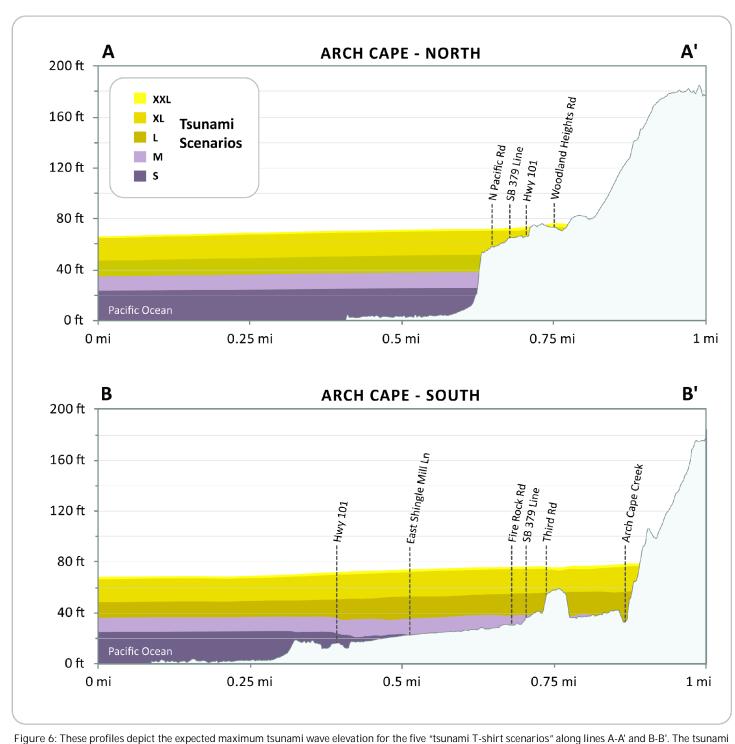


scenarios are modeled to occur at high tide and to account for local subsidence or uplift of the ground surface.



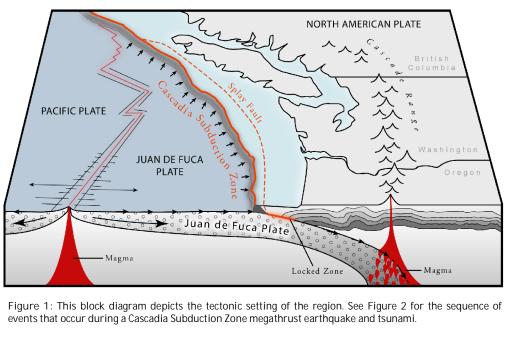


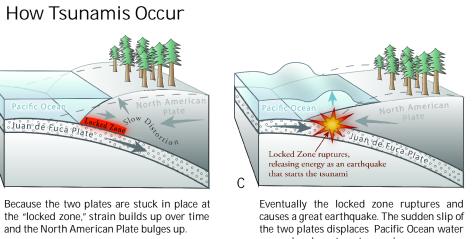






			Entire Map Area	City of Cannon Beach	Unincorporated Areas
Total Bui	ildings		896	415	481
		ınami Zones*	690	415	401
Juliuliigs	within 130	Small	110	42	68
		Medium	331	167	164
		Large	481	247	234
		Extra Large	694	333	361
		Extra Extra Large	719	344	375
Percent o	f Building	s within Tsunami Zones			
	J	Small	12.3%	10.1%	14.1%
		Medium	36.9%	40.2%	34.1%
		Large	53.7%	59.5%	48.6%
		Extra Large	77.5%	80.2%	75.1%
		Extra Extra Large	80.2%	82.9%	78.0%
	100% 90% 80%	nown are based on polygon	centroids and are cum	nulative within the n	nap area.
	100% 90% 80% 70%	nown are based on polygon	centroids and are cum	nulative within the n	nap area.
	100% 90% 80%	nown are based on polygon	centroids and are cum	nulative within the n	nap area.
	100% 90% 80% 70% 60%	nown are based on polygon	centroids and are cum	nulative within the n	nap area.
	100% 90% 80% 70% 60%	nown are based on polygon	centroids and are cum	nulative within the n	nap area.
ercent of Buildings within Tsunami Zones	100% 90% 80% 70% 60% 50% 40%	nown are based on polygon	centroids and are cum	nulative within the n	nap area.
	100% 90% 80% 70% 60% 40% 30% 20% 10%	nown are based on polygon	centroids and are cum	nulative within the n	nap area.
ercent of Buildings within Tsunami Zones	100% 90% 80% 70% 60% 40% 30% 20%	Entire Map Area	City of Cannon Beach		

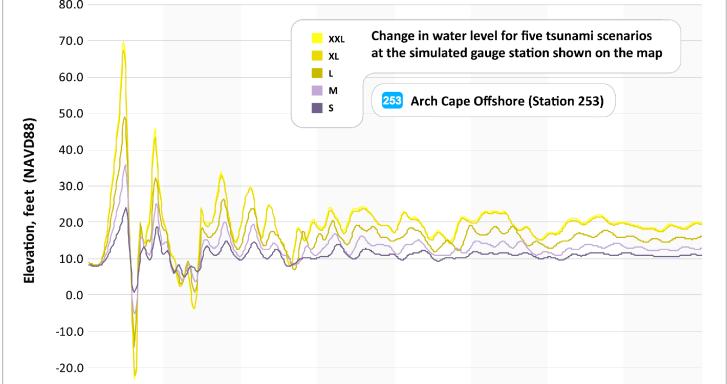

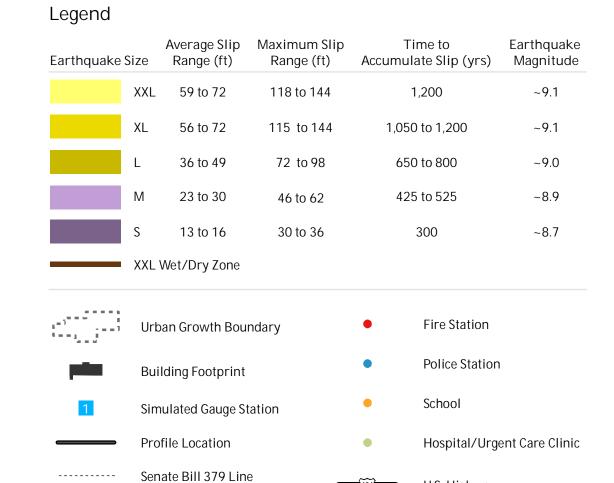


Elevation Contour

(25 ft intervals up to 200 ft)

Clat-01 Clatsop Spit Clat-07 Del Rey Beach Clat-02 Warrenton North Clat-03 Warrenton South - Rilea Clat-08 Gearhart - Seaside Clat-09 Cannon Beach Clat-05 Youngs River North Clat-10 Arch Cape - Falcon Cove

Tsunami Inundation Map Index

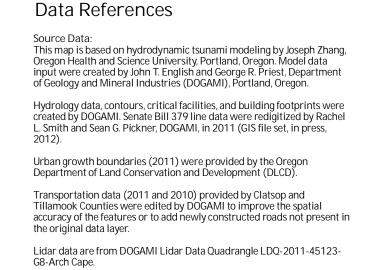

Coordinate System: Oregon Statewide Lambert Conformal Conic, Unit: International Feet, Horizontal Datum: NAD 1983 HARN, Vertical Datum:

NAVD 1988. Graticule shown with geographic coordinates

2007 Working Group on California Earthquake Probabilities (WGCEP), 2008, The Uniform California Earthquake Rupture Forecast, Version 2 (UCERF 2): U.S. Geological Survey Open-File Report 2007-1437 and California Geological Survey Special Report 203 [http://pubs.usgs.gov/of/2007/1437/]. Priest, G. R., 1995, Explanation of mapping methods and use of the tsunami hazard maps of the Oregon coast, Oregon Department of Geology and Mineral Industries Open-File Report O-95-67, 95 p. Priest, G.R., Goldfinger, C., Wang, K., Witter, R.C., Zhang, Y., and Baptista, A.M., 2009, Tsunami hazard assessment of the northern Oregon coast: a multi-deterministic approach tested at Cannon Beach, Clatsop County, Oregon: Oregon Department of Geology and Mineral Industries Special Paper 41, 87 p. Witter, R.C., Zhang, Y., Wang, K., Priest, G.R., Goldfinger, C., Stimely, L.L., English, J.T., and Ferro, P.A., 2011, Simulating tsunami inundation at Bandon, Coos County, Oregon, using hypothetical Cascadia and Alaska earthquake scenarios: Oregon Department of Geology and Mineral Industries Special Paper 43, 57 p.

Software: Esri ArcGIS® 10.1, Microsoft® Excel®, and Adobe® Funding: This map was funded under award #NA09NW54670014 by the National Oceanic and Atmospheric Administration (NOAA) through the National Tsunami Hazard Mitigation Program. Map Data Creation/Development: Tsunami Inundation Scenarios. George R. Priest, Laura L. Stimely, Daniel E. Coe, Paul A. Ferro, Sean G. Pickner, Rachel L. Smith Basemap Data. Kaleena L.B. Hughes, Sean G. Pickner Map Production: Cartography. Kaleena L.B. Hughes, Sean G. Pickner, Taylore E. Wille

Text: Don W.T. Lewis, Rachel L. Smith

Editing. Don W.T. Lewis, Rachel L. Smith Publication. Deborah A. Schueller Map Date. 06/14/2013

