



Local Source (Cascadia Subduction Zone) Tsunami Inundation Map Neskowin, Oregon

2012

Introduction

The Oregon Department of Geology and Mineral Industries (DOGAMI) has been identifying and mapping the tsunami inundation hazard along the Oregon coast since 1994. In Oregon, DOGAMI manages the National Tsunami Hazard Mitigation Program, which has been administered by the National Oceanic and Atmospheric Administration (NOAA) since 1995. DOGAMI's work is designed to help cities, counties, and other sites in coastal areas reduce the potential for disastrous tsunami-related consequences by understanding and mitigating this geologic hazard. Using federal funding awarded by NOAA, DOGAMI has developed a new generation of tsunami inundation maps to help residents and visitors along the entire Oregon coast prepare for the next Cascadia Subduction Zone (CSZ) earthquake and tsunami.

The CSZ is the tectonic plate boundary between the North American Plate and the Juan de Fuca Plate (Figure 1). These plates are converging at a rate of about 1.5 inches per year, but the movement is not smooth and continuous. Rather, the plates lock in place, and unreleased energy builds over time. At intervals, the accumulated energy is violently released in the form of a megathrust earthquake rupture, where the North American Plate suddenly slips westward over the Juan de Fuca Plate. This rupture causes a vertical displacement of water that creates a tsunami (Figure 2). Similar rupture processes and tsunamis have occurred elsewhere on the planet where subduction zones exist; for example, offshore Chile in 1960 and 2010, offshore Alaska in 1964, near Sumatra in 2004, and offshore Japan in March 2011.

CSZ Frequency Comprehensive research of the offshore geologic record indicates that at least 19 major ruptures of the full length of the CSZ have occurred off the Oregon coast over the past 10,000 years (Figure 3). All 19 of these full rupture CSZ events were likely magnitude 8.9 to 9.2 earthquakes (Witter and others, 2011). The most recent CSZ event happened approximately 300 years ago on January 26, 1700. Sand deposits carried onshore and left by the 1700 event have been found 1.2 miles inland; older tsunami sand deposits have also been discovered in estuaries 6 miles inland. As shown in Figure 3, the range in time between these 19 events varies from 110 to 1,150 years, with a median time interval of 490 years. In 2008 the United States Geological Survey (USGS) released the results of a study announcing that the probability of a magnitude 8-9 CSZ earthquake occurring over the next 30 years is 10% and that such earthquakes occur about every 500 years (WGCEP 2008).

CSZ Hazard Specificities The sizes of the earthquake and its resultant tsunami are primarily driven by the amount and type of slip that takes place when the North American Plate slips westward over the Juan de Fuca Plate during a CSZ event. DOGAMI has modeled a wide range of earthquake and tsunami sizes that take into account different fault geometries that could amplify the amount of seawater displacement and increase tsunami inundation. Seismic geophysical profiles show that there may be a steep slip fault running nearly parallel to the CSZ but closer to the Oregon coastline (Figure 1). The effect of this slip fault moving during a full rupture CSZ event would be an increase in the amount of vertical displacement of the Pacific Ocean, resulting in an increase of the tsunami inundation onshore in

Oregon. DOGAMI has also incorporated physical evidence that suggests that portions of the coast may drop 4 to 10 feet during the earthquake; this effect is known as subsidence. Detailed information on fault geometries, subsidence, computer models, and the methodology used to create the tsunami scenarios presented on this map can be found in DOGAMI Special Reports 41 (Prest and others, 2009) and 43 (Witter and others, 2011).

Map Explanation

This tsunami inundation map displays the output of computer models representing five selected tsunami scenarios, all of which include the earthquake-produced subsidence and the tsunami amplifying effects of the slip fault. Each scenario assumes that a tsunami occurs at Mean Higher High Water (MHHW) tide. MHHW is defined as the average height of the higher high tides observed over an 18-year period at the Garibaldi tide gauge. To make it easier to understand this scientific material and to enhance the educational aspects of hazard mitigation and response, the five scenarios are labeled as "T-shirt sizes" ranging from Small, Medium, Large, Extra Large, to Extra Extra Large (S, M, L, XL, XXL). The map legend depicts the respective amounts of slip, the frequency of occurrence, and the earthquake magnitude for these five scenarios. Figure 4 shows the cumulative number of buildings inundated within the map area.

The computer simulation model output is provided to DOGAMI as millions of points with values that indicate whether the location of each point is wet or dry. These points are converted to wet and dry contour lines that form the extent of inundation. The transition area between the wet and dry contour lines is termed the Wet/Dry Zone, which equates to the amount of error in the model when determining the maximum inundation for each scenario. Only the XXL Wet/Dry Zone is shown on this map.

This map also shows the regulatory tsunami inundation line (Oregon Revised Statutes 455.446 and 455.447), commonly known as the Senate Bill 379 line. Senate Bill 379 (1995) instructed DOGAMI to establish the extent of expected tsunami inundation based on scientific evidence and tsunami modeling in order to prohibit the construction of new essential and special occupancy structures in this tsunami inundation zone (Prest, 1995).

Time Series Graphs and Wave Elevation Profiles In addition to the tsunami scenarios, the computer model produces time series data for "gauge" locations in the area. These points are simulated gauge stations that record the time, in seconds, of the tsunami wave arrival and the wave height observed. It is especially noteworthy that the greatest wave height and velocity observed are not necessarily associated with the first tsunami wave to arrive onshore. Therefore, residents should not assume that the tsunami event is over until the proper authorities have sounded the all-clear signal at the end of the evacuation. Figure 5 depicts the tsunami waves as they arrive at a simulated gauge station. Figure 6 depicts the overall wave height and inundation extent for all five scenarios at the profile locations shown on this map.

Cascadia Subduction Zone Setting

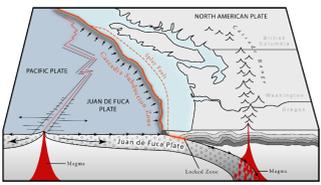


Figure 1. This block diagram depicts the tectonic setting of the region. See Figure 2 for the sequence of events that occur during a Cascadia Subduction Zone megathrust earthquake and tsunami.

How Tsunamis Occur

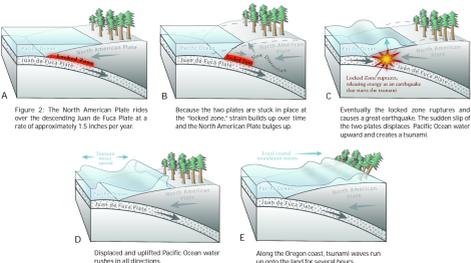


Figure 2. The North American Plate rides over the descending Juan de Fuca Plate at a rate of approximately 1.5 inches per year. Because the two plates are stuck in place at the "locked zone," strain builds up over time and the North American Plate bulges up. Eventually, the locked zone ruptures and causes a great earthquake. The sudden of the two plates displaces Pacific Ocean water upward and creates a tsunami. Displaced and uplifted Pacific Ocean water rushes in all directions. Along the Oregon coast, tsunami waves run up onto the land for several hours.

Occurrence and Relative Size of Cascadia Subduction Zone Megathrust Earthquakes

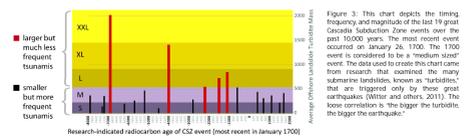


Figure 3. This chart depicts the timing frequency and magnitude of the last 19 great Cascadia Subduction Zone events over the past 10,000 years. The most recent event occurred on January 26, 1700. The 1700 event is considered to be a "medium sized" event. The data used to create this chart come from research that examined the many submarine landslides, known as "barbedules," that are triggered only by these great earthquakes (Witter and others, 2011). The loose correlation is "the bigger the turbidite, the bigger the earthquake."

Buildings within Tsunami Inundation Zones



*Building counts shown are based on polygon centroids, and are cumulative within the Tillamook Tsunami Inundation Model inside the map area.

Estimated Tsunami Wave Height through Time for Simulated Gauge Station

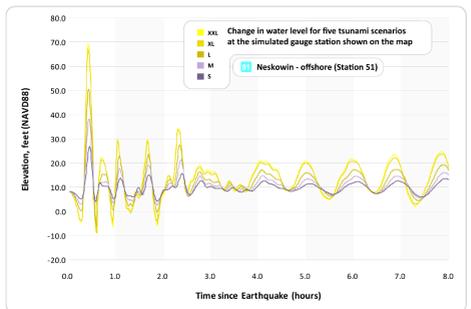


Figure 5. This chart depicts the tsunami waves as they arrive at the selected reference point (simulated gauge station). It shows the change in wave heights for all five tsunami scenarios over an 8-hour period. The first wave into the selected gauge station (Point 1) occurs at the time indicated by the vertical dashed line. Wave heights vary through time, and the first wave will not necessarily be the largest as waves interfere and reflect off local topography and bathymetry.

Maximum Wave Elevation Profiles


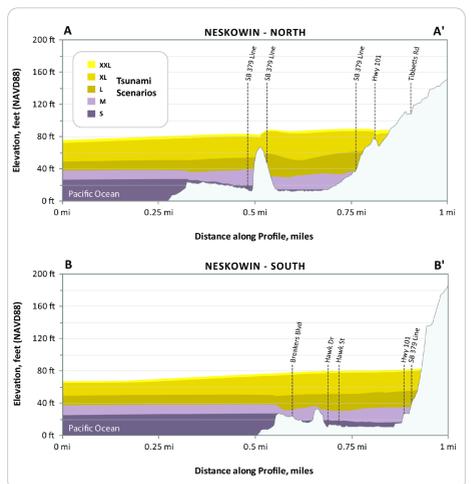


Figure 6. These profiles depict the expected maximum tsunami wave elevation for the five "T-shirt" scenarios along lines A-A' and B-B'. The tsunami scenarios are modeled to occur at high tide and are based on local subsidence at right of the ground surface.

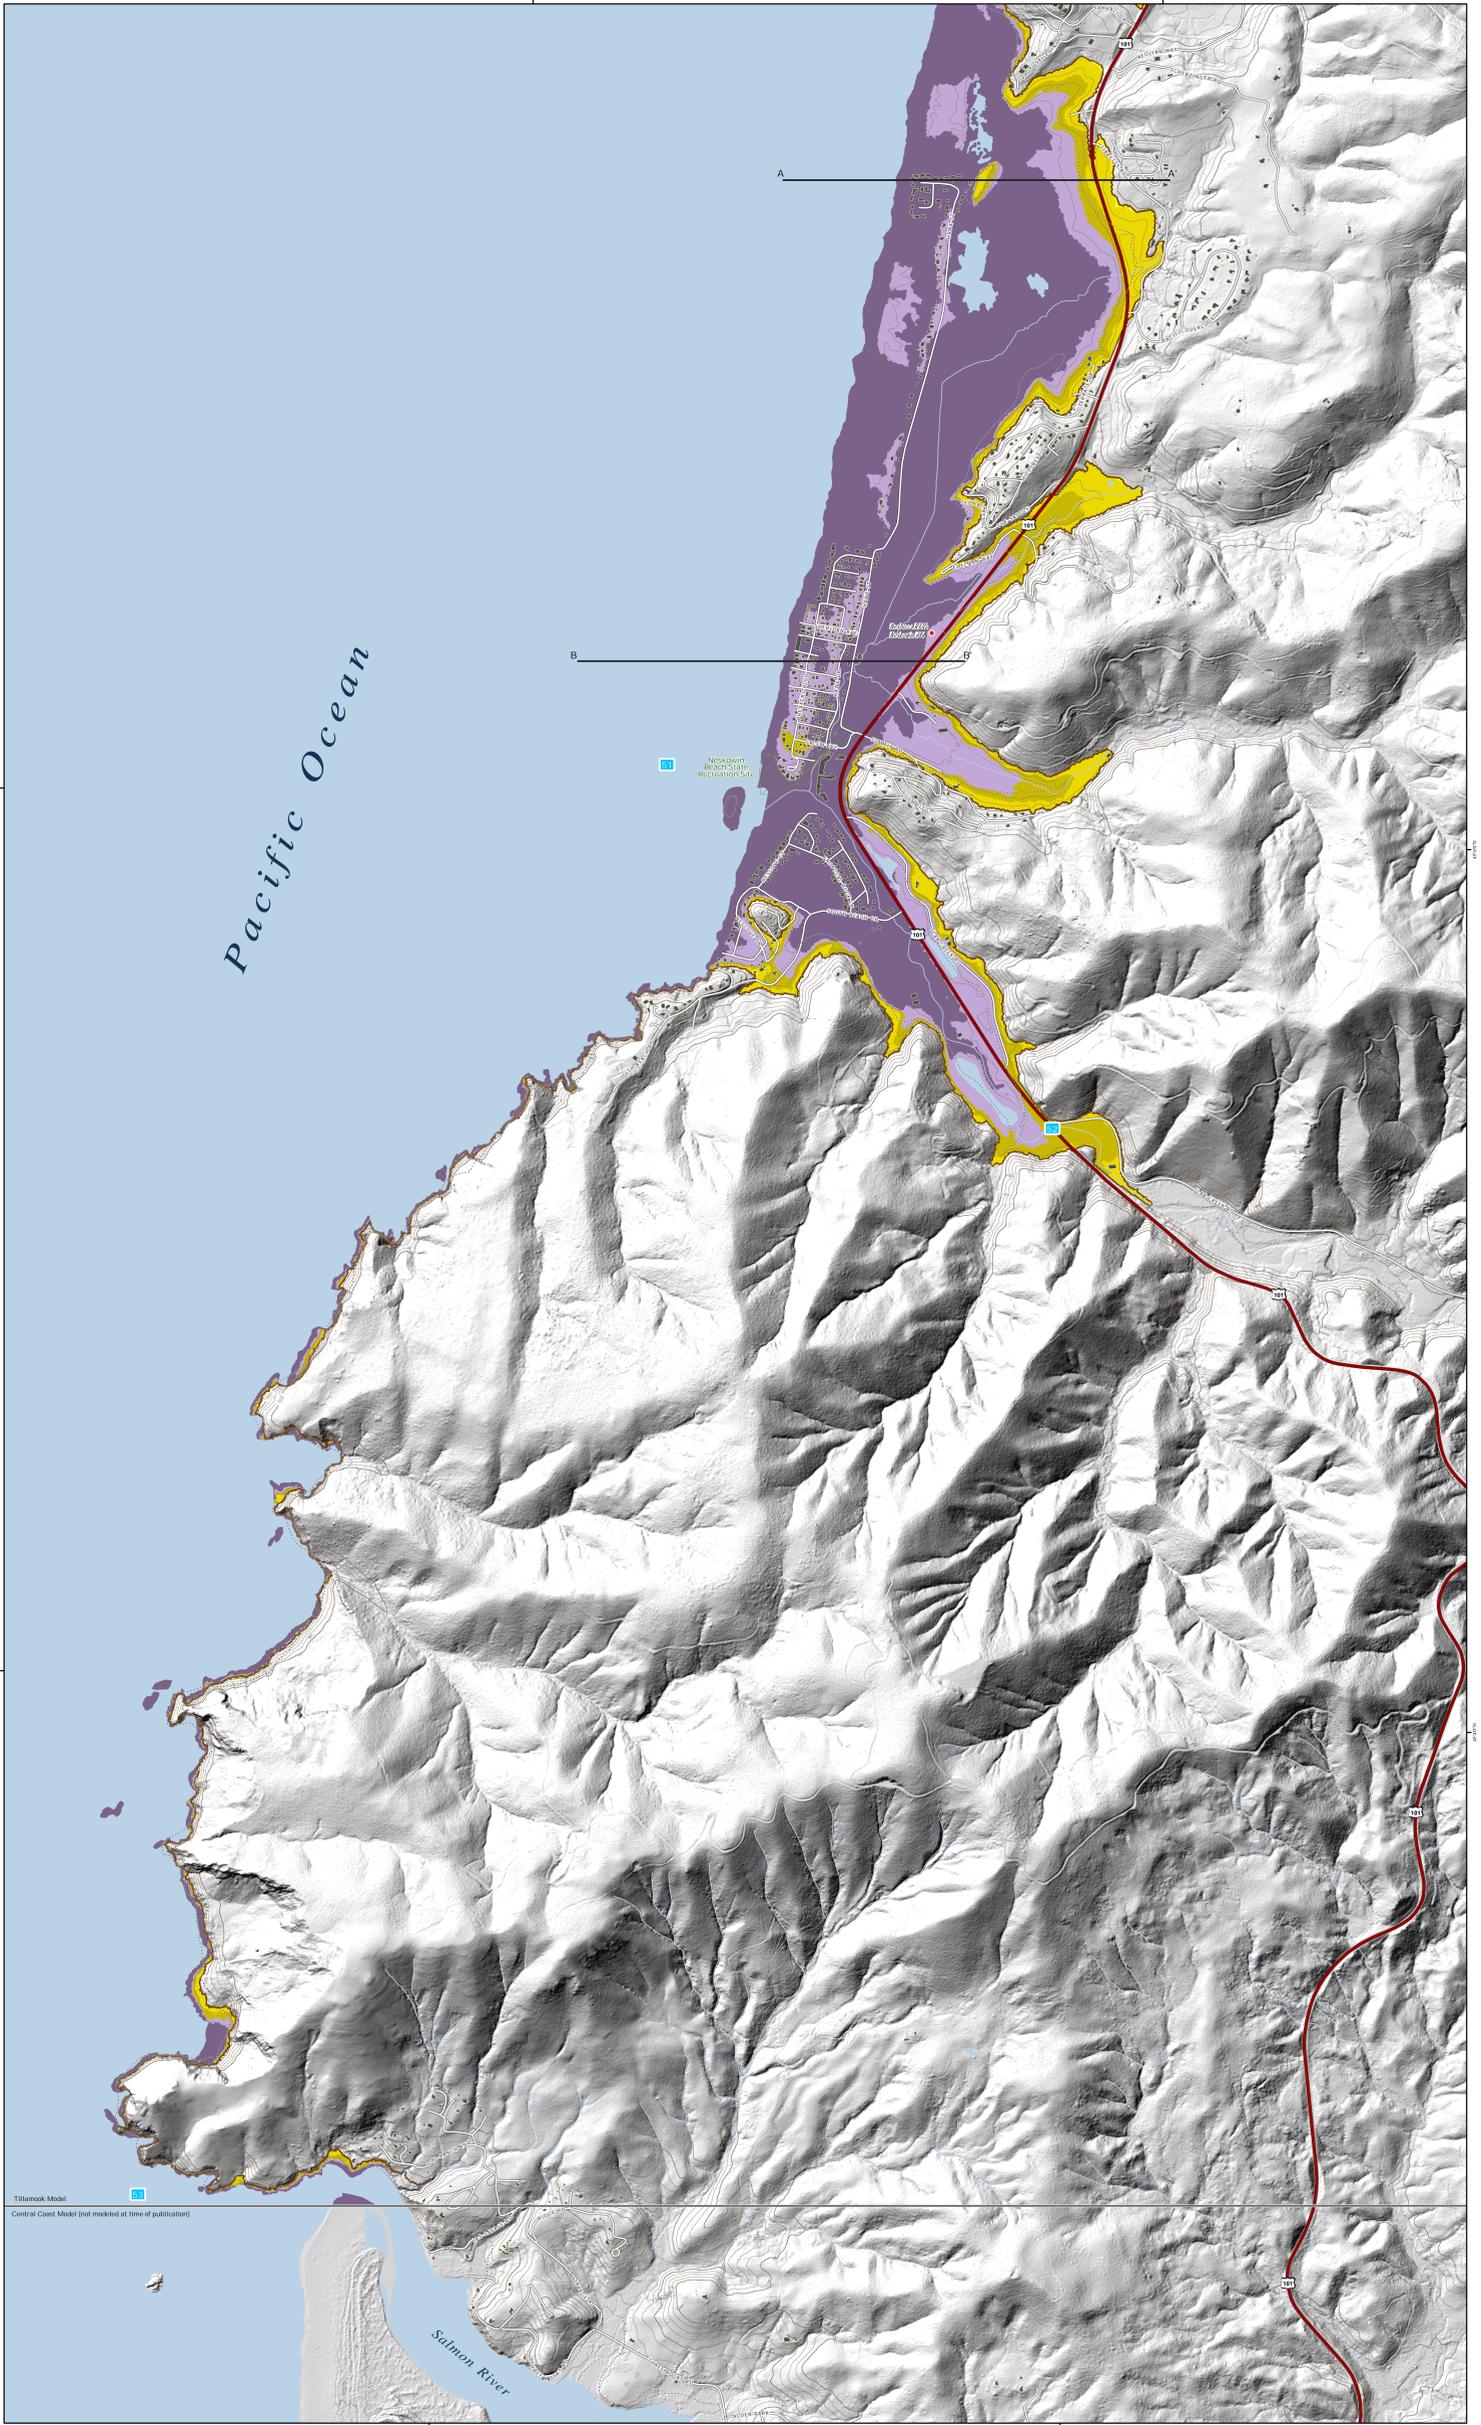

Legend

Earthquake Size	Average Slip Range (ft)	Maximum Slip Range (ft)	Time to Accumulate Slip (yrs)	Earthquake Magnitude
XXL	59 to 72	118 to 144	1,200	-9.1
XL	56 to 72	115 to 144	1,050 to 1,200	-9.0
L	36 to 49	72 to 98	650 to 800	-8.9
M	23 to 30	46 to 62	425 to 525	-8.9
S	13 to 16	30 to 36	300	-8.7

Urban Growth Boundary
 Building Footprint
 Simulated Gauge Station
 Profile Location
 Senate Bill 379 Line
 State Park
 Elevation Contour (25 ft Intervals up to 200 ft)
 Fire Station
 Police Station
 School
 Hospital/Urgent Care Clinic
 U.S. Highway
 State Highway
 Improved Road

Tsunami Inundation Map Index

T11-01 Arch Cape - Falcon Cove
 T11-02 Maunaloa - Nehalem
 T11-03 Nehalem East
 T11-04 Rockaway Beach
 T11-05 Garibaldi - Bay City
 T11-06 Tillamook North
 T11-07 Tillamook South
 T11-08 Cape Meares
 T11-09 Nehalem - Oronoke
 T11-10 Cape Lookout
 T11-11 Sand Lake
 T11-12 Pacific City
 T11-13 Neskowin Bay
 T11-14 Neskowin

Data References

Source Data:
 This map is based on hydrodynamic tsunami modeling by Joseph Zhang, Oregon Health and Science University, Portland, Oregon. Model data input were created by John T. English and George R. Priest, Department of Geology and Mineral Industries (DOGAMI), Portland, Oregon.
 Hydrology data, contours, critical facilities, and building footprints were created by DOGAMI. Senate Bill 379 line data were redigitized by Rachel R. Lyles Smith and Susan G. Pickner, DOGAMI, in 2011 (GIS files not in links, 2012).
 Urban growth boundaries (2010) were provided by the Oregon Department of Land Conservation and Development (DLCD).
 Transportation data (2011) provided by Tillamook County were redigitized by DOGAMI to improve the spatial accuracy of the features or to add newly constructed roads not present in the original data layer.
 Lidar data are from DOGAMI Lidar Data Quadrangles L1D 2011-40124-A1 NeskowinNorth, L1D 2011-40122-A6 Neskowin, and L1D 2011-40123-B8 NeskowinBay.
Coordinate System: Oregon Statewide Lambert Conformal Conic, Unit: International Foot, Horizontal Datum: NAD 1983 HARN, Vertical Datum: NAVD 1983. Gridlines show with geographic coordinates (longitude/latitude).
Scale: 1:10,000

References

2007 Working Group on California Earthquake Probabilities (WGCEP 2008). The Uniform California Earthquake Forecast, Version 2 (UCERF 2). U.S. Geological Survey Open-File Report 2007-1437 and California Geological Survey Special Report 203 (http://pubs.usgs.gov/ofr/2007/1437/).
 Priest, G. R., 1995. Evaluation of mapping methods and use of the tsunami hazard maps of the Oregon coast. Oregon Department of Geology and Mineral Industries Open File Report 0-95-43, 95 p.
 Priest, G.R., Goldfinger, C., Wang, K., Witter, R.C., Zhang, Y., and Boggsia, A.M., 2009. Tsunami hazard assessment of the northern Oregon coast: a multi-institutional approach based at Cannon Beach. Oregon Department of Geology and Mineral Industries Special Report 41, 87 p.
 Witter, R.C., Zhang, Y., Wang, K., Priest, G.R., Goldfinger, C., Shimmy, L.L., English, J.T., and Ferris, P.A., 2011. Simulating tsunami inundation at Cannon Beach, Oregon using hydrogeophysical Cascadia and Alaska earthquake scenarios. Oregon Department of Geology and Mineral Industries Special Report 43, 57 p.

Software: ArcGIS 10.0, Microsoft Excel®, and Adobe® Illustrator®
Funding: This map was funded under award #NA09OR05430034 by the National Oceanic and Atmospheric Administration (NOAA) through the National Tsunami Hazard Mitigation Program.
Map Data Creation/Development: Andrew Davidson, Geographer, George R. Priest, Laura L. Shimmy, Daniel E. Cox, Paul A. Ferris, Susan G. Pickner, Rachel R. Lyles Smith, Beverly G. Olin, Katerina L.B. Hughes, Sean G. Pickner.
Map Production: Cartography: Katerina L.B. Hughes, Sean G. Pickner, Taylor J. Worstell.
Art: Don W.T. Lewis, Rachel R. Lyles Smith, George R. Priest, Don W.T. Lewis, Rachel R. Lyles Smith, Publisher: Deborah A. Schuller, Alpha-Delta 07/12/2012.

Nature of the Northwest
 For a copy of this publication contact:
 800 NE Oregon Street, 4th, Ste. 900
 Portland, Oregon 97232
 telephone (503) 975-2511
 www.oregon.gov